

KSET91E2

Product family	Hood
Tipo de Exaustor	Integrated (semi) hood
Design	Telescopic
Extraction	Extraction
Electronic control	No
Perimeter extraction	No
Material	Painted material
EAN code	8017709274795
Aesthetic	Universal
Colour	Silver
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo serigrafado



Controls

Control setting	Slider
-----------------	--------

Program / Functions

No. of speeds	3
Intensive speed	No
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

Technical Features

			
Hood without motor	No	No. of filters	4
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	No
Light Power	4 W	Vent outlet	120 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	315 m³/h	Minimum distance from ELECTRIC hob	450 mm
Motor power	125 W	Non return valve	No

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	180	57
Speed 2	220	62
Speed 3	310	67

Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

Performance / Energy Label




Consumo anual de energía (CAE exaustor)	70 kWh/a
Energy efficiency class (EEC)	D
Fluid Dynamic Efficiency (FDE)	8,1
Fluid Dynamic Efficiency class (FDEC)	E
Lighting Efficiency (LE)	13 lux/W
Lighting Efficiency Class (LEC)	D
Grease Filtering Efficiency (GFE)	75,1 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minimum speed (Qmin)	180 m³/h
Air flow at maximum speed (Qmax)	310 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	57 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Time increase factor (F)	1,7
Energy Efficiency Index	91,4
Measured air flow rate at best efficiency point (Qbep)	164 m³/h
Measured air pressure at best efficiency point (Pbep)	183 Pa
Measured electric power input at best efficiency point (Wbep)	103 W
Nominal Power consumption of the light system (WL)	8 W
Average illumination of the light on the cooking surface (Emiddle)	100 lux
Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Plug	No	Frequency (Hz)	50 Hz
Electrical connection rating	133 W	Comprimento do cabo de alimentação	1000 mm
Voltage	220-240 V		

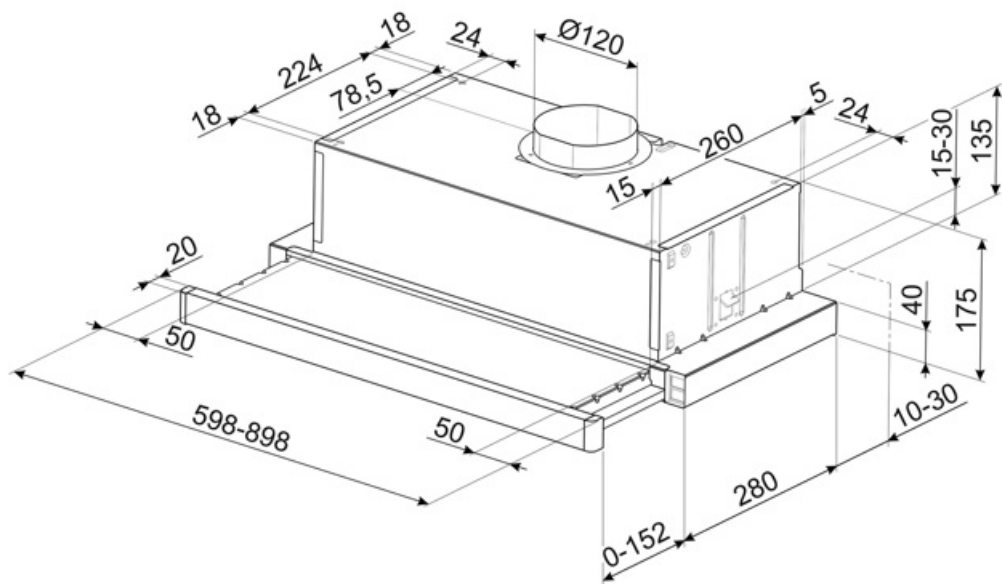

Compatible Accessories

KITFC6191

Filtro de carvão redondo (kit 2 peças)



Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.

