

# KSET96E

Product family Hood

Hood Type Integrated (semi) hood

Design Visible front panel

Extraction Extraction

Material Stainless steel

Type of steel Brushed

EAN code 8017709203481

Hood width 90 cm



650 mm

### **Aesthetics**

AestheticUniversaleSerigraphy colourBlackColourStainless steelLogoSilk screen

Finishing Satin

### **Controls**

Control setting Slider

## **Programme / Functions**

No. of speeds 3

### **Technical Features**



No. of lights2Anti-grease filtersAluminiumLight typeLEDVent outlet150 mmLight Power1 WMinimum distance from<br/>750 mm750 mm

Free outlet maximum 620 m³/h GAS hob

capacity Minimum distance from

Motor power 140 W ELECTRIC hob
No. of filters 4 Non return valve Yes



|            | Extraction rate IEC<br>61591 [m³/h] | Noise level IEC 60704-2-13<br>[dB(A)] |
|------------|-------------------------------------|---------------------------------------|
| Speed<br>1 | 295                                 | 52                                    |
| Speed<br>2 | 435                                 | 61                                    |
| Speed<br>3 | 580                                 | 68                                    |

## Performance / Energy Label

| 4 | С | A' |
|---|---|----|
|   |   |    |

**Annual Efficiency** 78 kWh/a Airbourne acouistical A- 52 dB(A) Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class C speed (SPEmin) (EEC) Airborne acoustical A-68 dB(A) Fluid Dynamic Efficiency 14.4 weighted sound Power (FDE) Emission at maximum Fluid Dynamic Efficiency D speed (SPEmax) class (FDEC) Time increase factor (F) Lighting Efficiency (LE) 59 lux/W **Energy Efficiency Index** 83.5 Lighting Efficiency Class A 322 m<sup>3</sup>/h Measured air flow rate (LEC) at best efficiency point **Grease Filtering** 76 % (Qbep) Efficiency (GFE) Measured air pressure 224 Pa **Grease Filtering** C at best efficiency point Efficiency Class (GFEC) (Pbep) Air flow at minumum 295 m<sup>3</sup>/h Measured electric 139 W speed (Qmin) power input at best Air flow at maximum 580 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 130 lux the light on the cooking surface (Emiddle) Sound power level at 68 dB(A)

#### **Electrical Connection**


Plug Not present Frequency (Hz) 50-60 Hz
Electrical connection 142 W Power supply cable 1500 mm length

Voltage 220-240 V

SMEG SPA 27/7/2024

highest setting (Lwa)



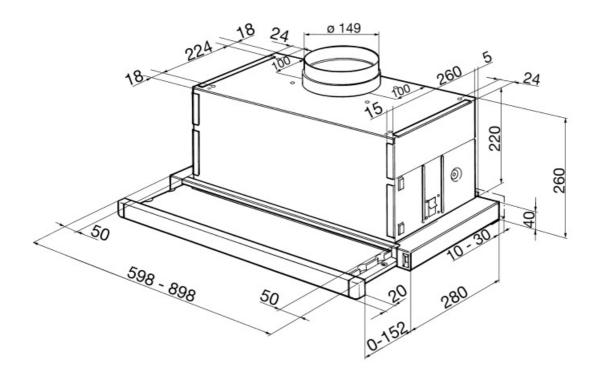



# Not included accessories

KITFC152



Charcoal filters Round Kit 2 pieces



# Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.