

KSET96E

| | |
|----------------|------------------------|
| Product family | Hood |
| Hood Type | Integrated (semi) hood |
| Design | Visible front panel |
| Extraction | Extraction |
| Material | Stainless steel |
| Type of steel | Brushed |
| EAN code | 8017709203481 |
| Hood width | 90 cm |



Aesthetics

| | | | |
|-----------|-----------------|-------------------|-------------|
| Aesthetic | Universale | Serigraphy colour | Black |
| Colour | Stainless steel | Logo | Silk screen |
| Finishing | Satin | | |

Controls

| | |
|-----------------|--------|
| Control setting | Slider |
|-----------------|--------|

Programme / Functions

| | |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

Technical Features

| | | | |
|--|---|------------------------------------|-----------|
|  |  | | |
| No. of lights | 2 | Anti-grease filters | Aluminium |
| Light type | LED | Vent outlet | 150 mm |
| Light Power | 1 W | Minimum distance from GAS hob | 750 mm |
| Free outlet maximum capacity | 620 m³/h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power | 140 W | Non return valve | Yes |
| No. of filters | 4 | | |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dB(A)] |
|---------|-------------------------------------|---------------------------------------|
| Speed 1 | 295 | 52 |
| Speed 2 | 435 | 61 |
| Speed 3 | 580 | 68 |


Performance / Energy Label



| | | | |
|--|----------|--|----------|
| Annual Efficiency Consumption (AEChood) | 78 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 52 dB(A) |
| Energy efficiency class (EEC) | C | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 68 dB(A) |
| Fluid Dynamic Efficiency (FDE) | 14,4 | Time increase factor (F) | 1,5 |
| Fluid Dynamic Efficiency class (FDEC) | D | Energy Efficiency Index | 83,5 |
| Lighting Efficiency (LE) | 59 lux/W | Measured air flow rate at best efficiency point (Qbep) | 322 m³/h |
| Lighting Efficiency Class (LEC) | A | Measured air pressure at best efficiency point (Pbep) | 224 Pa |
| Grease Filtering Efficiency (GFE) | 76 % | Measured electric power input at best efficiency point (Wbep) | 139 W |
| Grease Filtering Efficiency Class (GFEC) | C | Nominal Power consumption of the light system (WL) | 2 W |
| Air flow at minumum speed (Qmin) | 295 m³/h | Average illumination of the light on the cooking surface (Emiddle) | 130 lux |
| Air flow at maximum speed (Qmax) | 580 m³/h | Sound power level at highest setting (Lwa) | 68 dB(A) |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|----------|
| Electrical connection rating | 142 W | Frequency (Hz) | 50-60 Hz |
| Voltage | 220-240 V | Power supply cable length | 1500 mm |

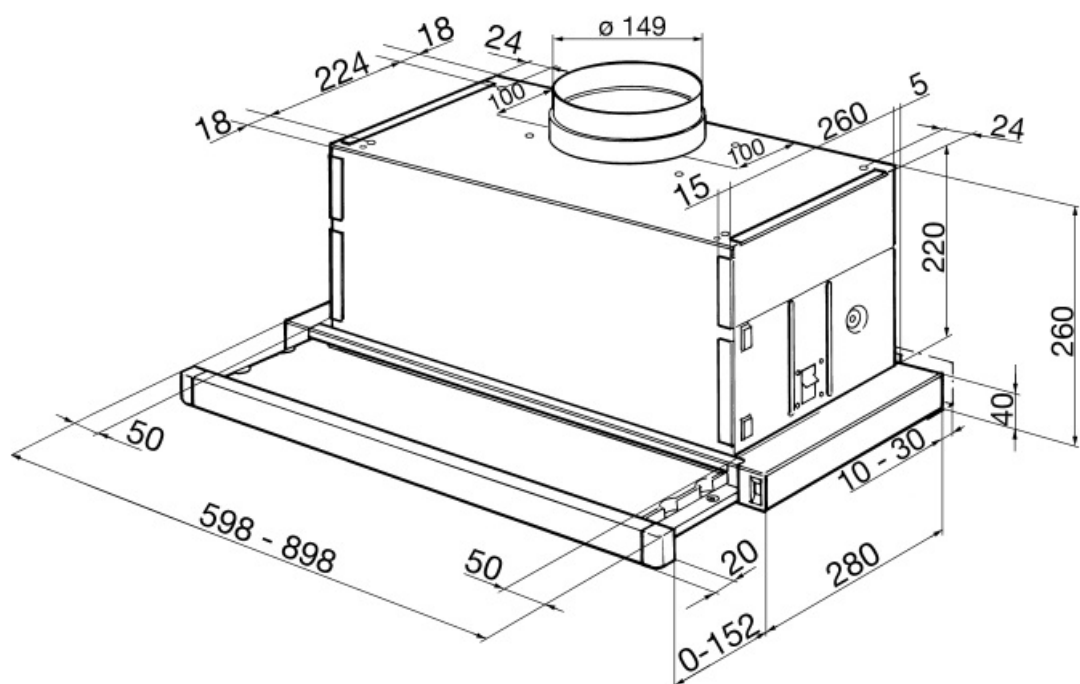

Not included accessories



KITFC152

Charcoal filters Round Kit 2 pieces

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



C: Product energy rating



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.