

KSET999XE

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Telescopic
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235123
Hood width	90 cm



Aesthetics

Aesthetic Colour	Universale Silver	Serigraphy colour Logo	Black Silk screen
------------------	-------------------	------------------------	-------------------



Controls

Control setting	Buttons
-----------------	---------

Programme / Functions

No. of speeds	3
---------------	---

Technical Features

			
No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light Power	2.5 W	Vent outlet	150 mm
Light color temperature scale (°K)	3500 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	664 m³/h	Minimum distance from ELECTRIC hob	430 mm
Motor power	200 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	256	46
Speed 2	377	55
Speed 3	647	67

Accessories Included

Tube reduction Yes

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood) 39 kWh/a
Energy efficiency class (EEC) A
Fluid Dynamic Efficiency (FDE) 33.5
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 29 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 66 %
Grease Filtering Efficiency Class (GFEC) D
Air flow at minumum speed (Qmin) 256 m³/h
Air flow at maximum speed (Qmax) 647 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 46 dB(A)
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 67 dB(A)
Time increase factor (F) 1.00
Measured air flow rate at best efficiency point (Qbep) 336 m³/h
Measured air pressure at best efficiency point (Pbep) 434 Pa
Measured electric power input at best efficiency point (Wbep) 121 W
Nominal Power consumption of the light system (WL) 5 W
Average illumination of the light on the cooking surface (Emiddle) 145 lux
Sound power level at highest setting (Lwa) 67 dB(A)

Electrical Connection


Electrical connection rating 205 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1000 mm

Optional accessories


Charcoal filter

KITFC400

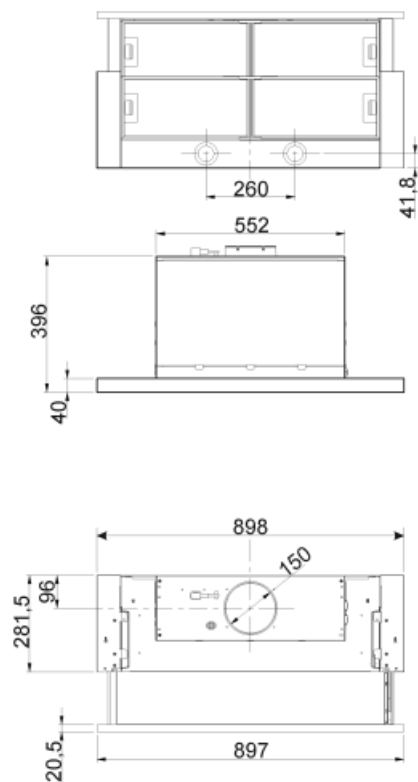


Non return valve

Yes

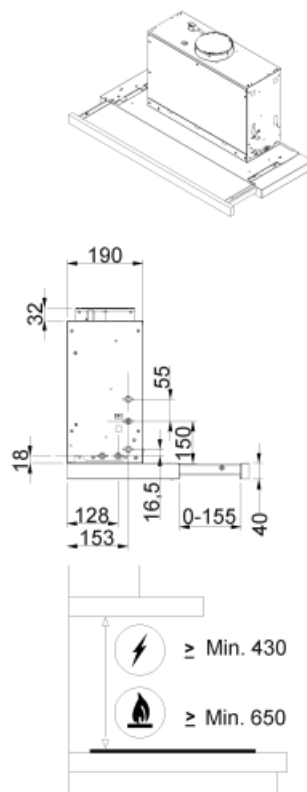

Not included accessories



KITFC400

Charcoal filters Kit 1 piece

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



A: Product drying performance, measured from A+++ to D / G depending on the product family