

KSET9XE2

Product family	Hood
Tipo de Exaustor	Integrated (semi) hood
Design	Telescopic
Extraction	Extraction
Electronic control	No
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709279943
Aesthetic	Universal
Colour	Silver
Cor da serigrafia	Serigrafia em preto
Logotipo	Logotipo serigrafado



Controls

Control setting	Slider
-----------------	--------

Program / Functions

No. of speeds	3
Intensive speed	No
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

Technical Features

			
Hood without motor	No	No. of filters	2
Remote motor	No	Anti-grease filters	Aluminium
No. of lights	2	Charcoal filters included	No
Light type	LED	Filter replacement indicator	No
Light Power	4 W	Vent outlet	120 mm
Dimmer mode	No	Minimum distance from GAS hob	650 mm
Escala de temperatura de cor clara (°K)	3000 °K	Minimum distance from ELECTRIC hob	450 mm
Free outlet maximum capacity	520 m³/h	Non return valve	No
Motor power	230 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	270	53
Speed 2	360	58
Speed 3	500	66

Accessories Included

Remote control	No	Tube reduction	Yes
Sliding door	No		

Performance / Energy Label




Consumo anual de energía (CAE exaustor)	127 kWh/a
Energy efficiency class (EEC)	D
Fluid Dynamic Efficiency (FDE)	9,8
Fluid Dynamic Efficiency class (FDEC)	E
Lighting Efficiency (LE)	16 lux/W
Lighting Efficiency Class (LEC)	D
Grease Filtering Efficiency (GFE)	75,1 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	270 m³/h
Air flow at maximum speed (Qmax)	500 m³/h


Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	66 dBA
Time increase factor (F)	1,6
Energy Efficiency Index	94,8
Measured air flow rate at best efficiency point (Qbep)	306 m³/h
Measured air pressure at best efficiency point (Pbep)	238 Pa
Measured electric power input at best efficiency point (Wbep)	207 W
Nominal Power consumption of the light system (WL)	8 W
Average illumination of the light on the cooking surface (Emiddle)	130 lux
Sound power level at highest setting (Lwa)	66 dBA

Electrical Connection

Plug	No	Frequency (Hz)	50 Hz
Electrical connection rating	238 W	Comprimento do cabo de alimentação	1500 mm
Voltage	220-240 V		

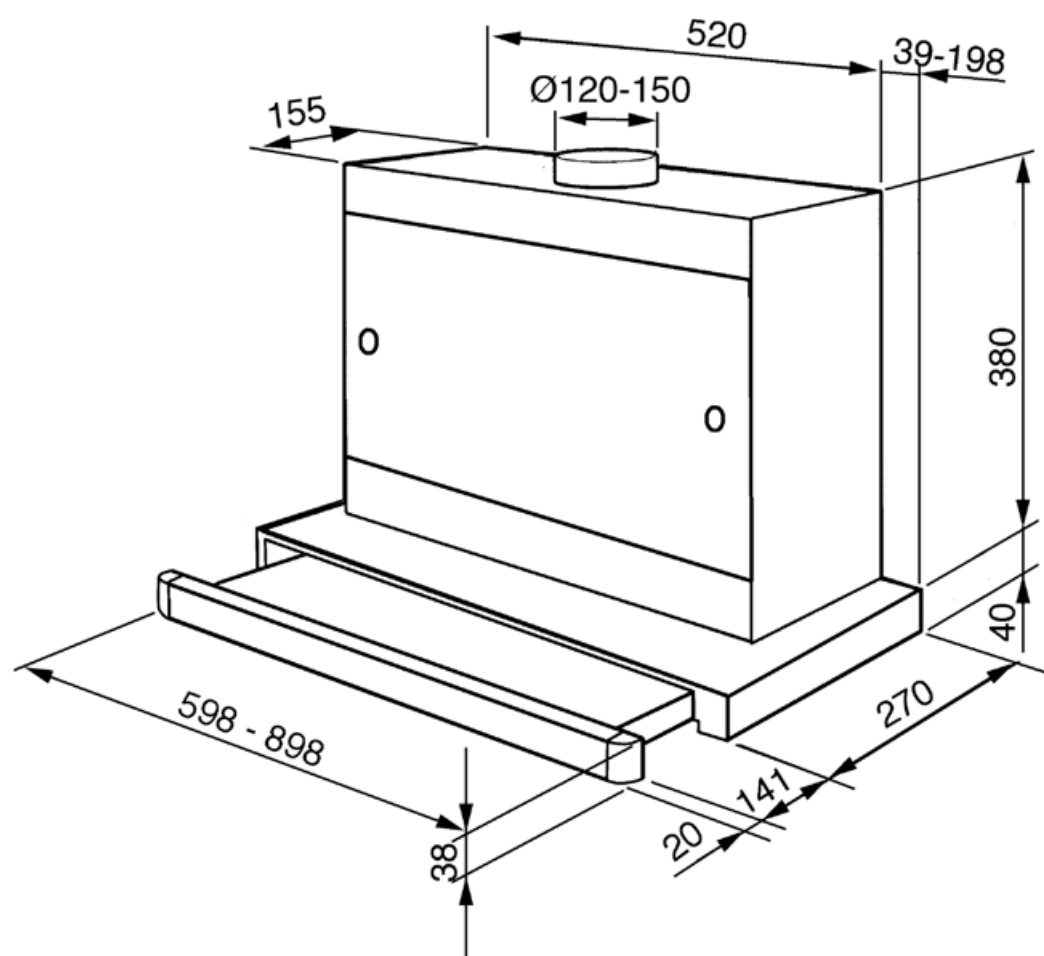

Compatible Accessories



KITFC156

Kit de filtros de carvão 2 peças

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.

