

# KSG6P4X



<b>Product family</b>	Hood
<b>Hood Type</b>	Canopy Cooker Hoods
<b>Design</b>	Fully integrated
<b>Extraction</b>	Ducted out or re-circulation possible
<b>Electronic control</b>	Yes
<b>Perimeter extraction</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709319366
<b>Hood width</b>	60 cm







## Aesthetics

<b>Aesthetics</b>	Universal	<b>Finishing</b>	Brushed
<b>Colour</b>	Stainless steel	<b>Logo</b>	Silk screen



## Controls

<b>Control setting</b>	Touch control back-lighted White	<b>Led colour</b>	White
------------------------	-------------------------------------	-------------------	-------

## Programs / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-Vent 2.0</b>	

## Technical Features

    	<b>No. of lights</b>	2	<b>No. of filters</b>	2
	<b>Light type</b>	LED	<b>Anti-grease filters</b>	Aluminium
	<b>Light power</b>	2.3 W		
	<b>Dimmer mode</b>	Yes		

Light colour temperature range	2700° - 4000° °K	Filter replacement indicator	Yes
Free outlet maximum capacity	730 m³/h	Vent outlet	150 mm
Motor power	230 W	Minimum distance from GAS hob	650 mm
		Minimum distance from ELECTRIC hob	650 mm
		Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	265	49
Speed 2	360	56
Speed 3	484	61
Intensive speed	660	67

## Performance / Energy Label






Annual Efficiency Consumption (AEChood)	58 KWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	62 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	67 dBA
Fluid Dynamic Efficiency (FDE)	27,9	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	B	Time increase factor (F)	1,0
Lighting Efficiency (LE)	39,3 lux/W	Energy Efficiency Index per first cavity	58
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	348 m³/h
Grease Filtering Efficiency (GFE)	74,9 %	Measured air pressure at best efficiency point (Qbep)	433 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	150 W
Air flow at minumum speed (Qmin)	265 m³/h	Normal Power of the light system (WI)	5 W
Maximum extraction rate	484 m³/h	Average illumination of the light on the cooking surface (Emiddle)	181 lux
Intensive extraction rate	660 m³/h	Sound power level at highest setting (Lwa)	62 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA		

## Electrical Connection

Nominal power 235 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1500 mm

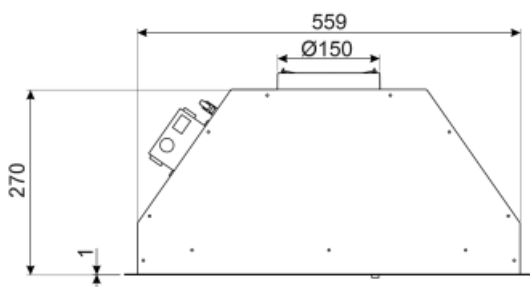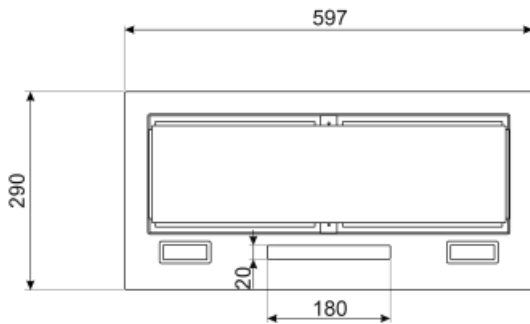

---

## Not included accessories

---

### FLT6












Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	...		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	...		...
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		...
	Intensive/turbo setting: when extra fast extraction is required.		