

KSG70HPE

| | |
|--------------------|------------------|
| Product family | Hood |
| Hood Type | Integrated hood |
| Design | Fully integrated |
| Extraction | Extraction |
| Electronic control | Yes |
| Material | Painted material |
| Type of steel | Brushed |
| EAN code | 8017709333621 |
| Hood width | 72 cm |
| Aesthetic | Universale |
| Colour | Stainless steel |
| Finishing | Satin |
| Serigraphy colour | Black |
| Logo | Silk screen |



Controls

| | | | |
|-----------------|---------|-----------|-------|
| Control setting | Buttons | Led color | White |
|-----------------|---------|-----------|-------|

Program / Functions

| | |
|---------------|---|
| No. of speeds | 3 |
|---------------|---|

Technical Features



| | | | |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights | 2 | No. of filters | 2 |
| Light type | LED | Anti-grease filters | Aluminium |
| Light Power | 5 W | Filter replacement indicator | Yes |
| Light color temperature scale (K) | 2700 K | Vent outlet | 150 mm |
| Free outlet maximum capacity | 580 m ³ /h | Minimum distance from GAS hob | 650 mm |
| Motor power | 175 W | Minimum distance from ELECTRIC hob | 500 mm |

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 232 | 44 |
| Speed 2 | 356 | 53 |

| | | |
|------------|-----|----|
| Speed 3 | 584 | 63 |
|------------|-----|----|

Accessories Included



Charcoal filters included Yes




Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 75 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 46 dBA |
| Energy efficiency class (EEC) | B | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 65 dBA |
| Fluid Dynamic Efficiency (FDE) | 20,9 | Time increase factor (F) | 1,2 |
| Fluid Dynamic Efficiency class (FDEC) | C | Energy Efficiency Index | 69,6 |
| Lighting Efficiency (LE) | 44,1 lux/W | Measured air flow rate at best efficiency point (Qbep) | 345 m ³ /h |
| Lighting Efficiency Class (LEC) | A | Measured air pressure at best efficiency point (Pbep) | 355 Pa |
| Grease Filtering Efficiency (GFE) | 75,1 % | Measured electric power input at best efficiency point (Wbep) | 163 W |
| Grease Filtering Efficiency Class (GFEC) | C | Nominal Power consumption of the light system (WL) | 5 W |
| Air flow at minimum speed (Qmin) | 225 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 221 lux |
| Air flow at maximum speed (Qmax) | 580 m ³ /h | Sound power level at highest setting (Lwa) | 65 dBA |

Electrical Connection

| | | | |
|------------------------------|-----------|---------------------------|-------------|
| Electrical connection rating | 285 W | Power supply cable length | 1000 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

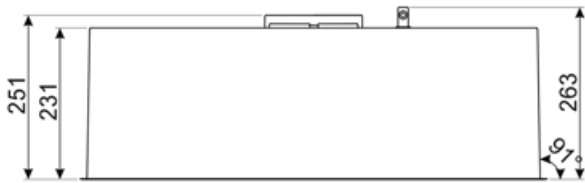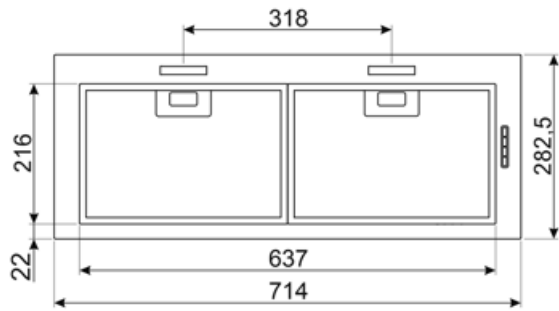

Compatible Accessories

KITFC221R

Charcoal filter high efficiency capable to regenerate and last up to 3 years.



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

