

# KSG70HPE

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Painted material
Type of steel	Brushed
EAN code	8017709333621
Hood width	72 cm



## Aesthetics

Aesthetic Colour Finishing	Universale Stainless steel Satin	Serigraphy colour Logo	Black Silk screen
----------------------------	--	---------------------------	----------------------

## Controls

Control setting	Buttons	Led color	White
-----------------	---------	-----------	-------

## Programs / Functions

No. of speeds	3
---------------	---

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	Yes
Light Power	5 W	Filter replacement indicator	Yes
Light color temperature scale (°K)	2700 °K	Vent outlet	150 mm
Free outlet maximum capacity	580 m <sup>3</sup> /h	Minimum distance from GAS hob	650 mm
Motor power	175 W	Minimum distance from ELECTRIC hob	500 mm
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	232	44
Speed 2	356	53
Speed 3	584	63


## Performance / Energy Label



Annual Efficiency Consumption (AEC <sub>hood</sub> )	75 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE <sub>max</sub> )	65 dBA
Energy efficiency class (EEC)	B	Power consumption in stand-by mode (P <sub>s</sub> )	0.49 W
Fluid Dynamic Efficiency (FDE)	20.9	Time increase factor (F)	1.2
Fluid Dynamic Efficiency class (FDEC)	C	Energy Efficiency Index	69.6
Lighting Efficiency (LE)	44.1 lux/W	Measured air flow rate at best efficiency point (Q <sub>bep</sub> )	345 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (P <sub>bep</sub> )	355 Pa
Grease Filtering Efficiency (GFE)	75.1 %	Measured electric power input at best efficiency point (W <sub>bep</sub> )	163 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	5 W
Air flow at minimum speed (Q <sub>min</sub> )	225 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (E <sub>middle</sub> )	221 lux
Air flow at maximum speed (Q <sub>max</sub> )	580 m <sup>3</sup> /h	Sound power level at highest setting (L <sub>wa</sub> )	65 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE <sub>min</sub> )	46 dBA		

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	285 W	Power supply cable length	1000 mm
Voltage	220-240 V		

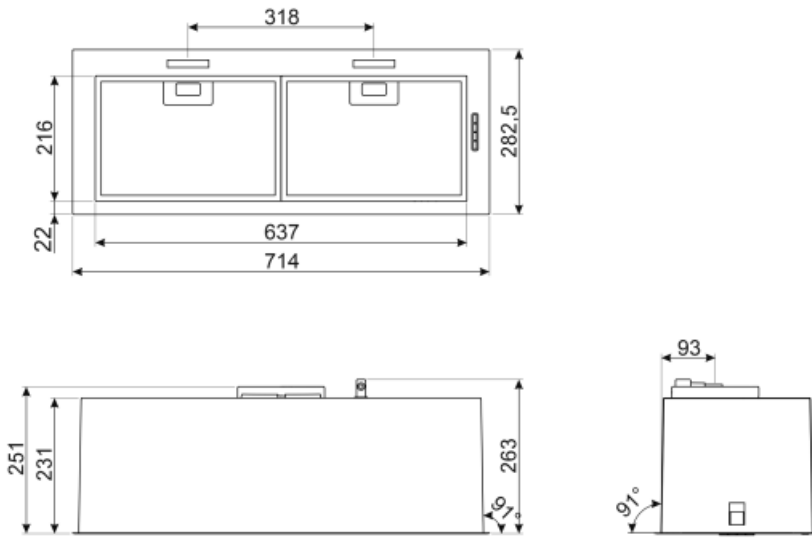

---

## Not included accessories

---

KITFC221R

Charcoal filter high efficiency capable to regenerate and last up to 3 years.



---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Charcoal filters:** Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

