# KSG70HPE

| | |
|---|---|
| **Product family** | Hood |
| **Hood Type** | Integrated hood |
| **Design** | Fully integrated |
| **Extraction** | Extraction |
| **Electronic control** | Yes |
| **Material** | Painted material |
| **Type of steel** | Brushed |
| **EAN code** | 8017709333621 |
| **Hood width** | 72 cm |
| **Aesthetic** | Universale |
| **Colour** | Stainless steel |
| **Finishing** | Satin |
| **Serigraphy colour** | Black |
| **Logo** | Silk screen |



## Controls

| | | | |
|---|---|---|---|
| **Control setting** | Buttons | **Led color** | White |

## Program / Functions

| | |
|---|---|
| **No. of speeds** | 3 |

## Technical Features

| | | | |
|---|---|---|---|
| **No. of lights** | 2 | **No. of filters** | 2 |
| **Light type** | LED | **Anti-grease filters** | Aluminium |
| **Light Power** | 5 W | **Filter replacement indicator** | Yes |
| **Light color temperature scale (K)** | 2700 K | **Vent outlet** | 150 mm |
| **Free outlet maximum capacity** | 580 m³/h | **Minimum distance from GAS hob** | 650 mm |
| **Motor power** | 175 W | **Minimum distance from ELECTRIC hob** | 500 mm |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|---|---|---|
| Speed 1 | 232 | 44 |
| Speed 2 | 356 | 53 |

| | | |
|---|---|---|
| Speed 3 | 584 | 63 |

## Accessories Included



**Charcoal filters included** Yes

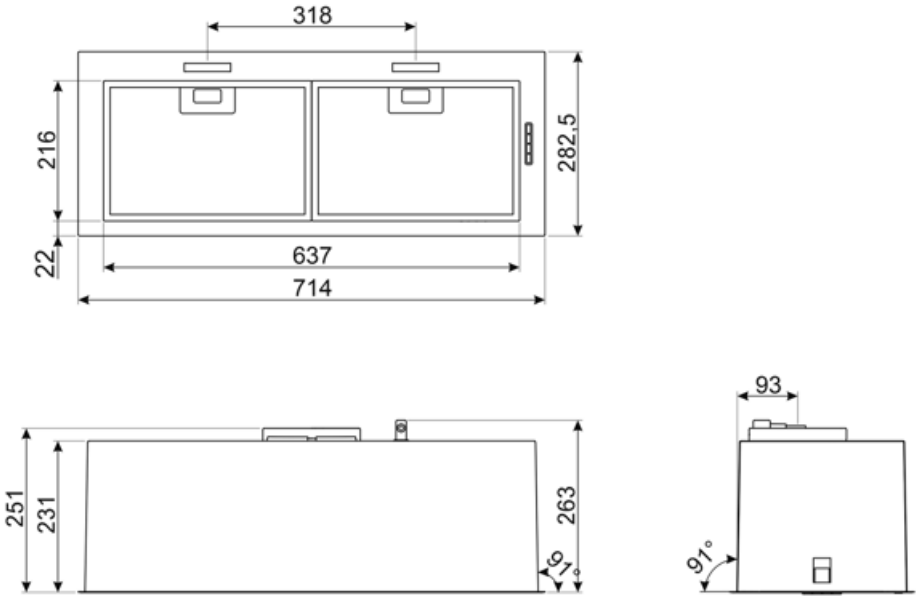
## Performance / Energy Label



| | |
|---|---|
| **Annual Efficiency Consumption (AEChood)** | 75 kWh/a |
| **Energy efficicency class ( EEC)** | B |
| **Fluid Dynamic Efficiency (FDE)** | 20,9 |
| **Fluid Dynamic Efficiency class (FDEC)** | C |
| **Lighting Efficiency (LE)** | 44,1 lux/W |
| **Lighting Efficiency Class (LEC)** | A |
| **Grease Filtering Efficiency (GFE)** | 75,1 % |
| **Grease Filtering Efficiency Class (GFEC)** | C |
| **Air flow at minumum speed (Qmin)** | 225 m³/h |
| **Air flow at maximum speed (Qmax)** | 580 m³/h |
| **Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)** | 46 dBA |
| **Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** | 65 dBA |
| **Time increase factor (F)** | 1,2 |
| **Energy Efficiency Index** | 69,6 |
| **Measured air flow rate at best efficiency point (Qbep)** | 345 m³/h |
| **Measured air pressure at best efficiency point (Pbep)** | 355 Pa |
| **Measured electric power input at best efficiency point (Wbep)** | 163 W |
| **Nominal Power consumption of the light system (WL)** | 5 W |
| **Average illumination of the light on the cooking surface (Emiddle)** | 221 lux |
| **Sound power level at highest setting (Lwa)** | 65 dBA |

## Electrical Connection

| | |
|---|---|
| **Electrical connection rating** | 285 W |
| **Voltage** | 220-240 V |
| **Frequency (Hz)** | 50-60 Hz |
| **Power supply cable length** | 1000 mm |
| **Plug** | Not present |


318
216
282,5
22
637
714
251
231
263
91°
93
91°

## Compatible Accessories



**KITFC221R**

Charcoal filter high efficiency capable to regenerate and last up to 3 years.

# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

