

# KSG74B



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709226183
Hood width	72 cm



## Aesthetics

Aesthetics	Universal	Glass Type	White
Colour	Stainless steel	Serigraphy colour	Grey
Finishing	Glass	Logo	Silk screen

## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	stainless steel 7 layer
Light power	1 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	750 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	235 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	280	48
Speed 2	367	55

Speed 3	480	61
Intensive speed	700	68


## Performance / Energy Label



<b>Annual Efficiency Consumption (AEChood)</b>	68 kWh/year	<b>Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)</b>	60 dBA
<b>Energy efficiency class (EEC)</b>	B	<b>Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)</b>	67 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	22,6	<b>Power consumption in stand-by mode (Ps)</b>	0,49 W
<b>Fluid Dynamic Efficiency class (FDEC)</b>	C	<b>Time increase factor (F)</b>	1,00
<b>Lighting Efficiency (LE)</b>	68 lux/W	<b>Energy Efficiency Index per first cavity</b>	57,2
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air flow rate at best efficiency point (Qbep)</b>	344 m <sup>3</sup> /h
<b>Grease Filtering Efficiency (GFE)</b>	65,9 %	<b>Measured air pressure at best efficiency point (Qbep)</b>	437 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	D	<b>Measured electric power input at best efficiency point (Wbep)</b>	154 W
<b>Air flow at mininum speed (Qmin)</b>	247 m <sup>3</sup> /h	<b>Normal Power of the light system (WI)</b>	2 W
<b>Maximum extraction rate</b>	450 m <sup>3</sup> /h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	118 lux
<b>Intensive extraction rate</b>	592 m <sup>3</sup> /h	<b>Sound power level at highest setting (Lwa)</b>	60 dBA
<b>Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)</b>	47 dBA		

## Electrical Connection

<b>Nominal power</b>	238 W	<b>Frequency (Hz)</b>	50-60 Hz
<b>Voltage</b>	220-240 V	<b>Power supply cable length</b>	1000 mm

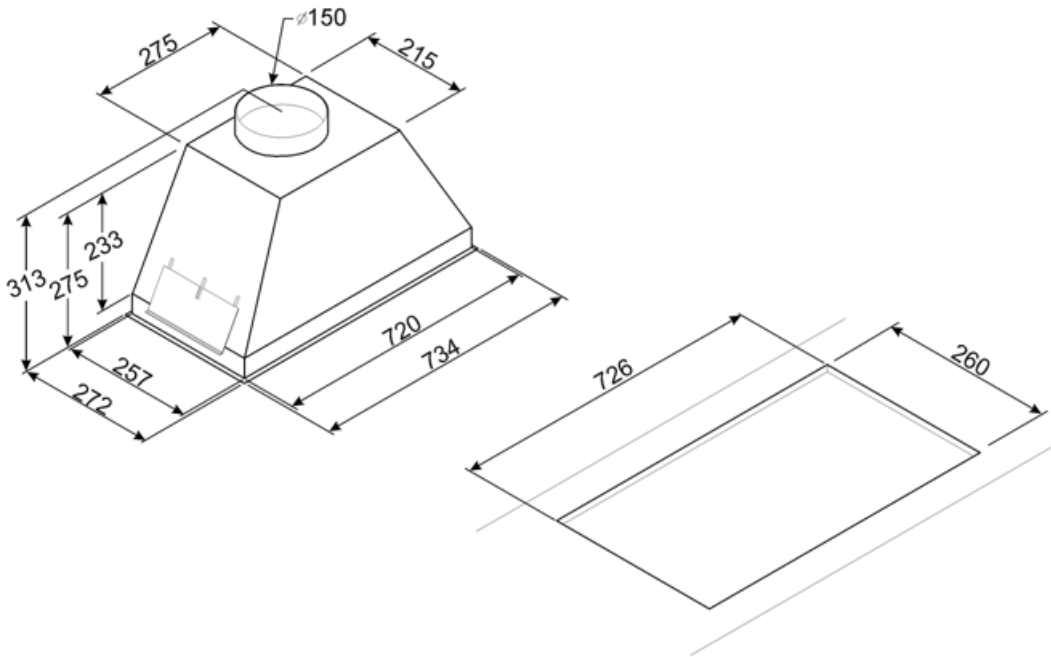

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Perimeter extraction panels:** very efficient and aid noise reduction.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.