

KSG74B



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709226183
Hood width	
Aesthetics	Universal
Colour	Stainless steel
Finishing	Glass
Glass Type	White
Serigraphy colour	Grey
Logo	Silk screen





Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

Technical Features

			
No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	stainless steel 7 layer
Light power	1 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	750 m ³ /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	235 W	Non return valve	Yes

Extraction rate IEC 61591 [m³/h]

Noise level IEC 60704-2-13 [dBA]

Speed 1	280	48
Speed 2	367	55
Speed 3	480	61
Intensive speed	700	68


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	68 kWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	60 dBA
Energy efficiency class (EEC)	B	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	67 dBA
Fluid Dynamic Efficiency (FDE)	22,6	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	C	Time increase factor (F)	1,00
Lighting Efficiency (LE)	68 lux/W	Energy Efficiency Index per first cavity	57,2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	344 m ³ /h
Grease Filtering Efficiency (GFE)	65,9 %	Measured air pressure at best efficiency point (Qbep)	437 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	154 W
Air flow at minimum speed (Qmin)	247 m ³ /h	Normal Power of the light system (WI)	2 W
Maximum extraction rate	450 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	118 lux
Intensive extraction rate	592 m ³ /h	Sound power level at highest setting (Lwa)	60 dBA
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA		

Electrical Connection

Nominal power	238 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1000 mm

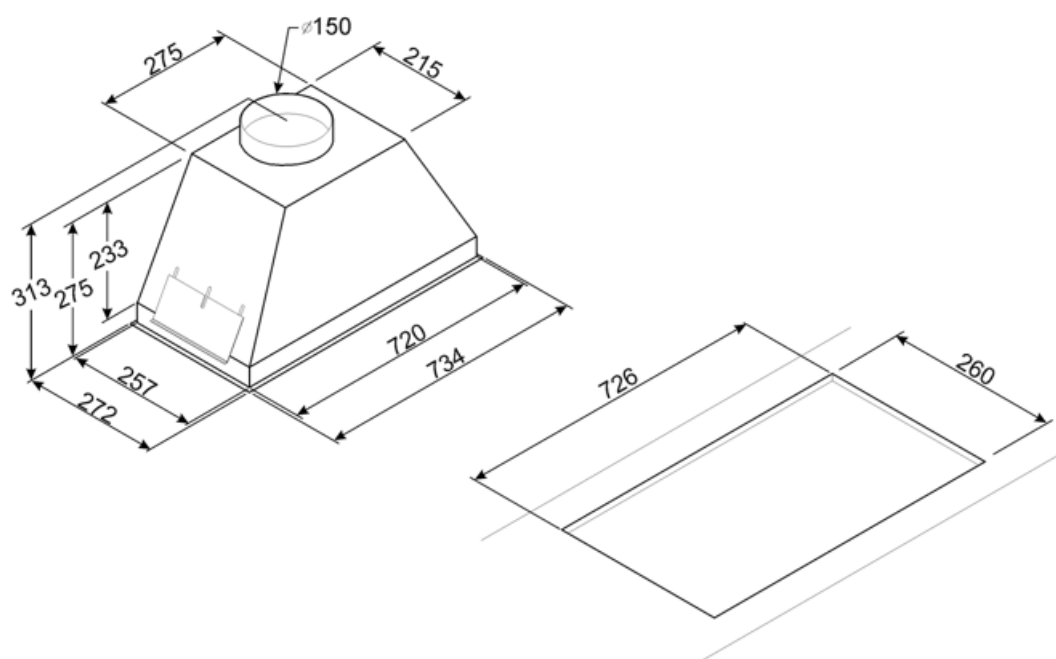

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Perimeter extraction panels: very efficient and aid noise reduction.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.