

# KSG74B



Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless Steel + Glass
Type of steel	Brushed
EAN code	8017709226183
Hood width	
Aesthetics	Universal
Colour	Stainless steel
Finishing	Glass
Glass Type	White
Serigraphy colour	Grey
Logo	Silk screen



## Controls

Control setting	Electronic buttons	Led colour	White
-----------------	--------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	stainless steel 7 layer
Light power	1 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	650 mm
temperature scale (°K)		Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	750 m³/h	Non return valve	Yes
Motor power	235 W		

Extraction rate IEC  
61591 [m³/h]

Noise level IEC 60704-  
2-13 [dBA]

Speed 1	280	48
Speed 2	367	55
Speed 3	480	61
Intensive speed	700	68

## Performance / Energy Label




**Annual Efficiency Consumption (AEChood)** 68 kWh/year  
**Energy efficiency class (EEC)** B  
**Fluid Dynamic Efficiency (FDE)** 22.6  
**Fluid Dynamic Efficiency class (FDEC)** C  
**Lighting Efficiency (LE)** 68 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 65.9 %  
**Grease Filtering Efficiency Class (GFEC)** D  
**Air flow at mininum speed (Qmin)** 247 m³/h  
**Maximum extraction rate** 450 m³/h  
**Intensive extraction rate** 592 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 47 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 60 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 67 dBA  
**Time increase factor (F)** 1.00  
**Energy Efficiency Index per first cavity** 57.2  
**Measured air flow rate at best efficiency point (Qbep)** 344 m³/h  
**Measured air pressure at best efficiency point (Qbep)** 437 Pa  
**Measured electric power input at best efficiency point (Wbep)** 154 W  
**Normal Power of the light system (WI)** 2 W  
**Average illumination of the light on the cooking surface (Emiddle)** 118 lux  
**Sound power level at highest setting (Lwa)** 60 dBA

## Electrical Connection

**Nominal power** 238 W  
**Voltage** 220-240 V  
**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1000 mm

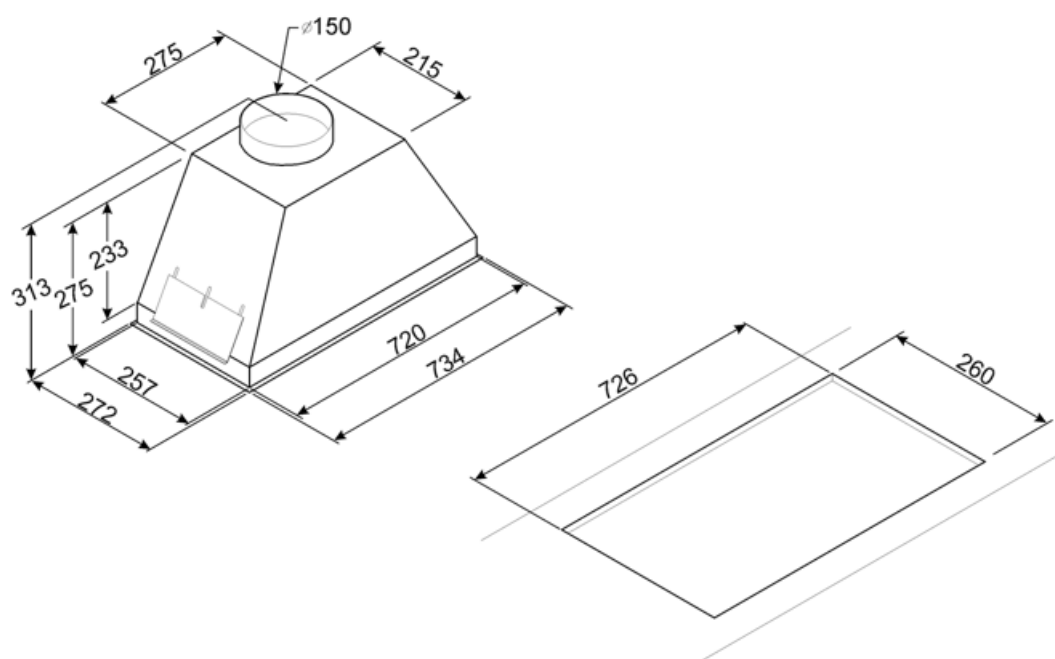

---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Perimeter extraction panels:** very efficient and aid noise reduction.



---

## Benefit

---

### **Dimmering & Tunable lights**

Customisable LED lighting lets you adjust both the intensity and color temperature, from warm to cool tones, so you can create the perfect lighting for any mood or task

### **Perimetral aspiration**

Enhanced extraction with a perimeter aspiration system ensures optimised performance, for a cleaner, fresher kitchen

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture