

# KSG8P4X







Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709319373
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Silk screen








## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

## Technical Features

						
No. of lights	2	No. of filters	2			
Light type	LED	Anti-grease filters	Aluminium			
Light power	2.3 W	Filter replacement indicator	Yes			
Dimmer mode	Yes	Vent outlet	150 mm			
Light colour temperature range	2700° - 4000° °K	Minimum distance from GAS hob	650 mm			
Free outlet maximum capacity	730 m³/h	Minimum distance from ELECTRIC hob	650 mm			
Motor power	230 W	Non return valve	Yes			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	266	46
Speed 2	356	52
Speed 3	480	60
Intensive speed	681	67

## Performance / Energy Label



**Annual Efficiency Consumption (AEChood)** 53 KWh/year

**Energy efficiency class (EEC)** A

**Fluid Dynamic Efficiency (FDE)** 29.7

**Fluid Dynamic Efficiency class (FDEC)** A

**Lighting Efficiency (LE)** 38.0 lux/W

**Lighting Efficiency Class (LEC)** A

**Grease Filtering Efficiency (GFE)** 73.8 %

**Grease Filtering Efficiency Class (GFEC)** D

**Air flow at minumum speed (Qmin)** 266 m³/h

**Maximum extraction rate** 480 m³/h

**Intensive extraction rate** 681 m³/h

**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)** 46 dBA

**Airborne acouistical A-weighted sound Power Emission at maximum speed (SPEmax)** 60 dBA

**Airbourne acouistical A-weighted sound power emission at boost speed (SPEboost)** 67 dBA

**Time increase factor (F)** 0.9

**Energy Efficiency Index per first cavity** 52.5

**Measured air flow rate at best efficiency point (Qbep)** 356 m³/h

**Measured air pressure at best efficiency point (Qbep)** 448 Pa

**Measured electric power input at best efficiency point (Wbep)** 149 W

**Normal Power of the light system (WI)** 5 W


**Average illumination of the light on the cooking surface (Emiddle)** 175 lux

**Sound power level at highest setting (Lwa)** 60 dBA

## Electrical Connection

**Nominal power** 235 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm

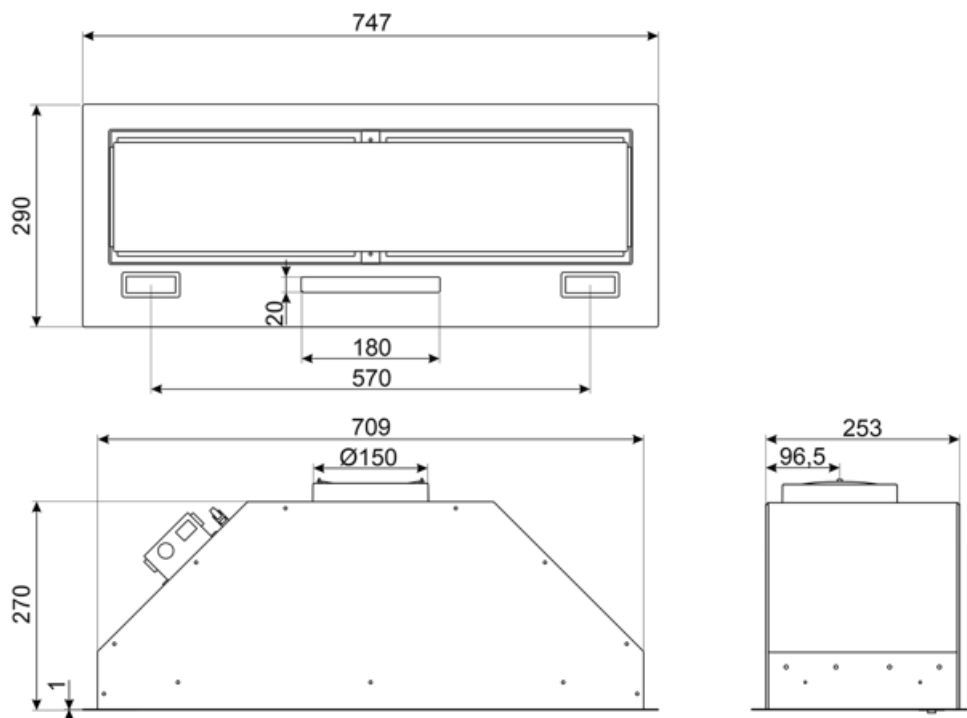

---

## Compatible Accessories

---



### FLT6












Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A: Product drying performance, measured from A+++ to D / G depending on the product family
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Warning light(s): to advise when filters need changing.		Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
	Perimeter extraction panels: very efficient and aid noise reduction.		Intensive/turbo setting: when extra fast extraction is required.
	...		...
	...		

---

## Benefit

---

### **Dimmering & Tunable lights**

Customisable LED lighting lets you adjust both the intensity and colour temperature, from warm to cool tones, so you can create the perfect lighting for any mood or task

### **Perimetral aspiration**

Enhanced extraction with a perimeter aspiration system ensures optimised performance, for a cleaner, fresher kitchen

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralised and practical control via Bluetooth connection between hob and hood, letting you manage extraction automatically while you cook.

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.