

KSG8P4X



Product family Hood

Hood Type Integrated hood Fully integrated Design Extraction Extraction **Electronic control** Yes

Perimeter extraction Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709319373

Hood width 75 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Silk screen Logo



Controls

Control setting Touch control back-lighted Led color White

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options

Auto-vent 2.0









Technical Features











No. of lights 2 Light type **LED Light Power** 2,3 W Dimmer mode

Light color temperature

range

Free outlet maximum

capacity

Motor power

2700 - 4000 K

730 m³/h

230 W

No. of filters

Anti-grease filters

Filter replacement indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

650 mm

150 mm

650 mm

Aluminium

Yes

Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	266	46
Speed 2	356	52
Speed 3	480	60
Intensive speed	681	67

Performance / Energy Label

A f

Annual Efficiency 53 kWh/a Consumption (AEChood) Energy efficieency class A Fluid Dynamic Efficiency 29,7 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 38,0 lux/W Lighting Efficiency Class A (LEC) **Grease Filtering** 73,8 % Efficiency (GFE) **Grease Filtering** D Efficiency Class (GFEC) Air flow at minumum 266 m³/h speed (Qmin) Air flow at maximum 480 m³/h speed (Qmax) Air flow at boost speed 681 m³/h

Airbourne acouistical A- 46 dBA weighted sound Power **Emission at minimum** speed (SPEmin) Airborne acoustical A-60 dBA weighted sound Power Emission at maximum speed (SPEmax) Airbourne acoustical A- 67 dBA weighted sound power emission at boost speed (SPEboost) Time increase factor (F) **Energy Efficiency Index** 52,5 Measured air flow rate 356 m³/h at best efficiency point Measured air pressure 448 Pa at best efficiency point (Pbep) Measured electric 149 W power input at best efficiency point (Wbep) **Nominal Power** 5 W consumption of the light system (WL) Average illumination of 175 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 235 W

rating

(Qboost)

Voltage 220-240 V Frequency (Hz) 50-60 Hz Power supply cable

Sound power level at

highest setting (Lwa)


length


Plug Not present

60 dBA

1500 mm



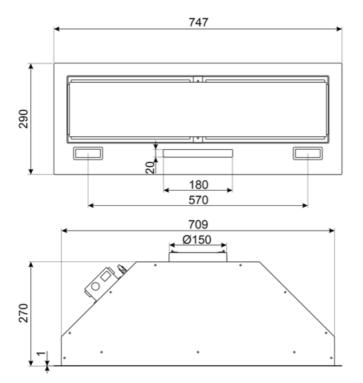





Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



Dimmering Lights



Tunable white from warm to cold