

KSG8P4X



Product family	Hood
Tipo de Exaustor	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709319373
Hood width	75 cm
Aesthetic	Universal
Colour	Stainless steel
Acabamento	Satin
Logotipo	Logotipo serigrafado



Controls

Control setting	Controle de toque retroiluminado Branco	Led color	White
-----------------	--	-----------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Other functions	No
Time-setting options	
Other options	No
Ventilação automática	No
Ventilação automática 2.0	

Technical Features

						
Hood without motor	No	No. of filters	2			
Remote motor	No	Anti-grease filters	Aluminium			
No. of lights	2	Charcoal filters included	No			
Light type	LED	Filter replacement indicator	Yes			
Light Power	2,3 W					
Dimmer mode	Yes	Vent outlet	150 mm			

Faixa de temperatura de cor clara	2700 - 4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	266	46
Speed 2	356	52
Speed 3	480	60
Intensive speed	681	67

Accessories Included

Remote control	No	Tube reduction	No
----------------	----	----------------	----

Performance / Energy Label




Consumo anual de energia (CAE exaustor)	53 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	46 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	60 dBA
Fluid Dynamic Efficiency (FDE)	29,7	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	67 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	38,0 lux/W	Energy Efficiency Index	52,5
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	356 m³/h
Grease Filtering Efficiency (GFE)	73,8 %	Measured air pressure at best efficiency point (Pbep)	448 Pa
Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	149 W
Air flow at minumum speed (Qmin)	266 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	480 m³/h	Average illumination of the light on the cooking surface (Emiddle)	175 lux
Air flow at boost speed (Qboost)	681 m³/h		

Sound power level at
highest setting (Lwa) 60 dBA

Electrical Connection

Electrical connection rating 235 W
Voltage 220-240 V
Frequency (Hz) 50-60 Hz

Comprimento do cabo
de alimentação 1500 mm
Plug No

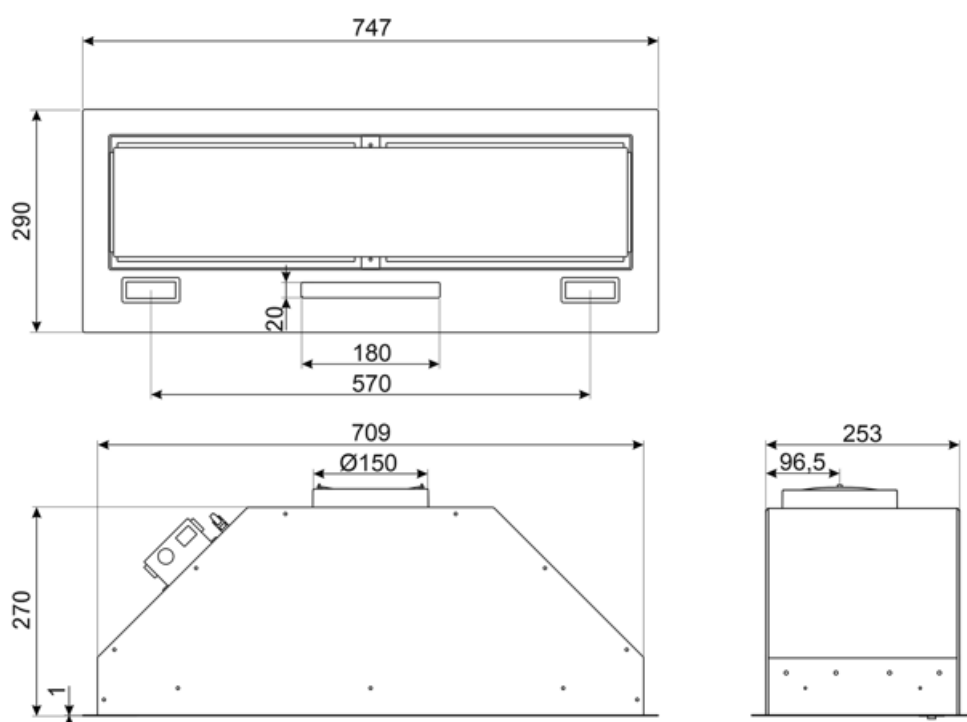

Compatible Accessories



FLT6

Filtros de carvão redondos (kit 2 peças)



KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos

Symbols glossary

	24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos		Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.
	Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.		Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.
	Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.
	Ligação entre a placa e o exaustor		Luzes de escurecimento
	Branco sintonizável do quente ao frio		