

# KSGAU9P4VN







Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709336608
Aesthetic	Universale
Colour	Stainless Steel and Glass
Finishing	Satin
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light Power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h	Minimum distance from ELECTRIC hob	650 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	243	45
Speed 2	362	53
Speed 3	481	59
Intensive speed	697	67

## Performance / Energy Label




**Annual Efficiency Consumption (AEChood)** 53 kWh/a  
**Energy efficiency class (EEC)** A  
**Fluid Dynamic Efficiency (FDE)** 30,1  
**Fluid Dynamic Efficiency class (FDEC)** A  
**Lighting Efficiency (LE)** 31,1 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 77,9 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 242 m³/h  
**Air flow at maximum speed (Qmax)** 481 m³/h  
**Air flow at boost speed (Qboost)** 697 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 45 dBA  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 60 dBA  
**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)** 67 dBA  
**Time increase factor (F)** 0,9  
**Energy Efficiency Index** 52,6  
**Measured air flow rate at best efficiency point (Qbep)** 369 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 446 Pa  
**Measured electric power input at best efficiency point (Wbep)** 152 W  
**Nominal Power consumption of the light system (WL)** 5 W  
**Average illumination of the light on the cooking surface (Emiddle)** 143 lux  
**Sound power level at highest setting (Lwa)** 60 dBA

## Electrical Connection

**Plug** (I) Australia  
**Electrical connection rating** 235 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm

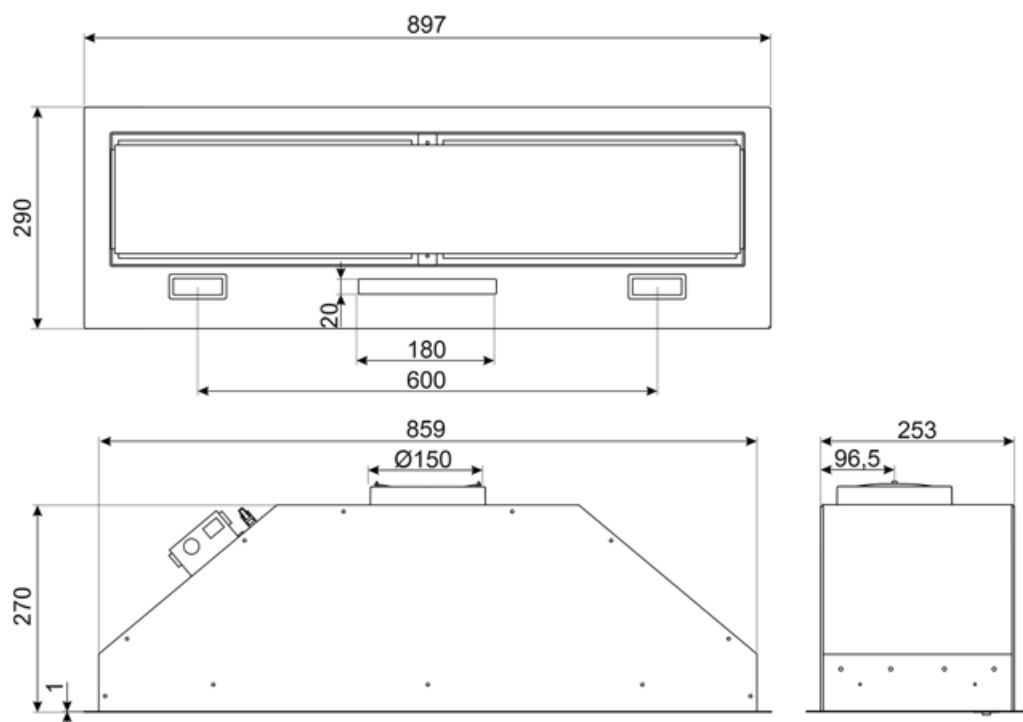

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



...



A: Product drying performance, measured from A+++ to D / G depending on the product family



Warning light(s): to advise when filters need changing.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



...



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



...

---

## Benefit (TT)

---

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.