

KSGT124X






Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328375
Hood width	120 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed








Controls

Control setting	Touch control back-lighted White	Led colour	White
------------------------	-------------------------------------	-------------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	
Auto-vent 2.0	

Technical Features

				
No. of lights	2	No. of filters	4	
Light type	LED	Anti-grease filters	Stainless steel	
Light power	2.3 W	Filter replacement indicator	Yes	
Dimmer mode	Yes	Vent outlet	150 mm	
Light colour temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	820 m ³ /h	Minimum distance from ELECTRIC hob	500 mm	

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	223	47
Speed 2	392	55
Speed 3	554	66
Intensive speed	721	70


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	47 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	33.1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	31.7 lux/W	Energy Efficiency Index per first cavity	46.7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	355 m ³ /h
Grease Filtering Efficiency (GFE)	91.4 %	Measured air pressure at best efficiency point (Qbep)	471 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	140 W
Air flow at mininum speed (Qmin)	223 m ³ /h	Normal Power of the light system (WI)	5 W
Maximum extraction rate	554 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	146 lux
Intensive extraction rate	721 m ³ /h	Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Nominal power	280 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

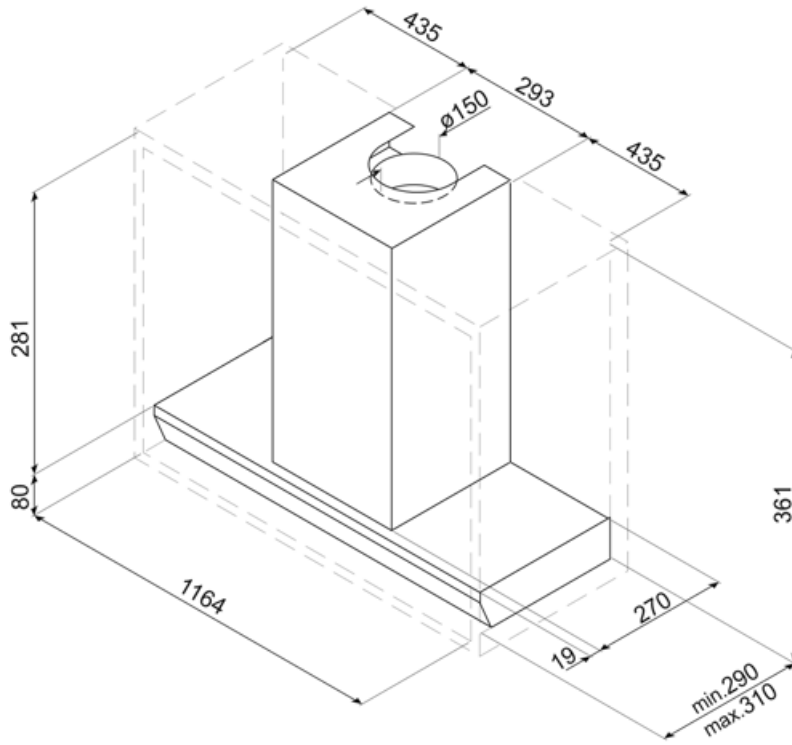


Compatible Accessories














KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT124

Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  A: Product drying performance, measured from A+++ to D / G depending on the product family
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights
-  V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold.