

# KSGT124X

Product family	Hood
Hood Type	Canopy Cooker Hoods
Design	Fully integrated
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328375
Hood width	120 cm
Aesthetics	Universal
Colour	Stainless steel
Finishing	Brushed
Logo	Embossed



## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	4
Light type	LED	Anti-grease filters	Stainless steel
Light power	2.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour	2700 - 4000 K	Minimum distance from GAS hob	650 mm
temperature range		Minimum distance from ELECTRIC hob	500 mm
Free outlet maximum capacity	820 m³/h		

**Motor power** 275 W **Non return valve** Yes


	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	223	47
Speed 2	392	55
Speed 3	554	66
Intensive speed	721	70

## Performance / Energy Label

  	Annual Efficiency Consumption (AEChood)	47 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class ( EEC)			Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	33.1		Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A		Time increase factor (F)	0.9
Lighting Efficiency (LE)	31.7 lux/W		Energy Efficiency Index per first cavity	46.7
Lighting Efficiency Class (LEC)	A		Measured air flow rate at best efficiency point (Qbep)	355 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	91.4 %		Measured air pressure at best efficiency point (Qbep)	471 Pa
Grease Filtering Efficiency Class (GFEC)	B		Measured electric power input at best efficiency point (Wbep)	140 W
Air flow at minimum speed (Qmin)	223 m <sup>3</sup> /h		Normal Power of the light system (WI)	5 W
Maximum extraction rate	554 m <sup>3</sup> /h		Average illumination of the light on the cooking surface (Emiddle)	146 lux
Intensive extraction rate	721 m <sup>3</sup> /h		Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection

<b>Nominal power</b>	280 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V		
<b>Frequency (Hz)</b>	50-60 Hz	<b>Plug</b>	No

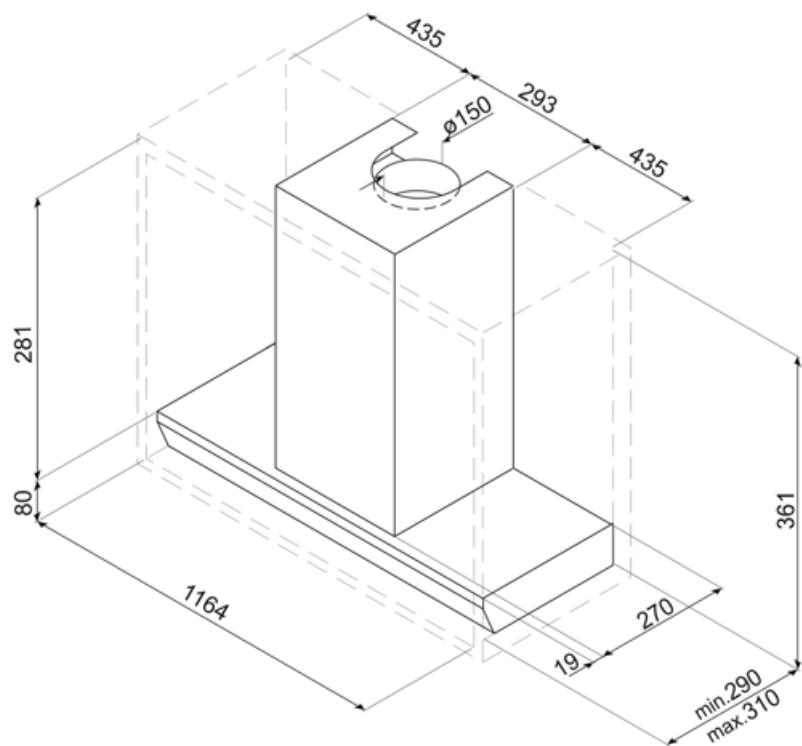

---

## Compatible Accessories

---



**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



**KITFCGT124**

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



...

V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Connection between hob and hood



...