

# KSGT124X

<b>Product family</b>	Hood
<b>Hood Type</b>	Integrated hood
<b>Design</b>	Fully integrated
<b>Extraction</b>	Extraction
<b>Electronic control</b>	Yes
<b>Material</b>	Stainless steel
<b>Type of steel</b>	Brushed
<b>EAN code</b>	8017709328375
<b>Hood width</b>	120 cm
<b>Aesthetic</b>	Universale
<b>Colour</b>	Stainless steel
<b>Finishing</b>	Satin
<b>Logo</b>	Embossed



## Controls

<b>Control setting</b>	Touch control back-lighted White	<b>Led color</b>	White
------------------------	-------------------------------------	------------------	-------

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-vent 2.0</b>	
<b>V-Condense System</b>	

## Technical Features



<b>No. of lights</b>	2	<b>No. of filters</b>	4
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Stainless steel
<b>Light Power</b>	2,3 W	<b>Filter replacement indicator</b>	Yes
<b>Dimmer mode</b>	Yes	<b>Vent outlet</b>	150 mm
<b>Light color temperature range</b>	2700 - 4000 K	<b>Minimum distance from GAS hob</b>	650 mm
<b>Free outlet maximum capacity</b>	820 m <sup>3</sup> /h	<b>Minimum distance from ELECTRIC hob</b>	500 mm

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	223	47
Speed 2	392	55
Speed 3	554	66
Intensive speed	721	70


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	47 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	33,1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	31,7 lux/W	Energy Efficiency Index	46,7
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	355 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	91,4 %	Measured air pressure at best efficiency point (Pbep)	471 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	140 W
Air flow at minumum speed (Qmin)	223 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	554 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	146 lux
Air flow at boost speed (Qboost)	721 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection

Electrical connection rating	280 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

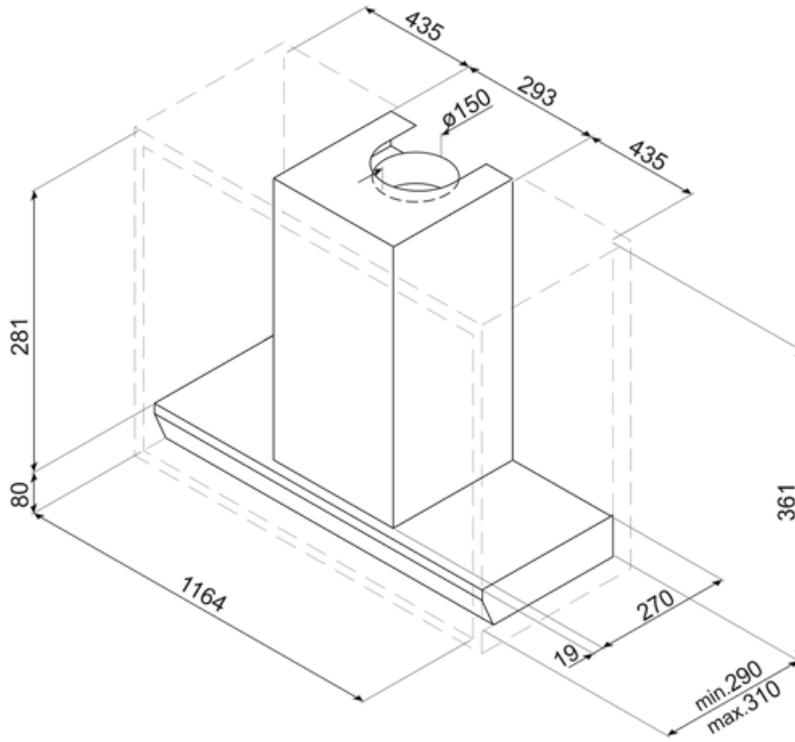

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCGT124

## Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Energy efficiency class A
-  Warning light(s): to advise when filters need changing.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights
-  V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Connection between hob and hood
-  Tunable white from warm to cold.