

KSGT61X

Product family Hood

Hood Type Integrated hood Design Fully integrated Extraction Extraction

Electronic control Yes

Stainless steel Material Type of steel Brushed

EAN code 8017709322069

Hood width 56 cm **Aesthetic** Universale Colour Stainless steel

Finishing Satin Logo Silk screen



Controls

Control setting Control knobs

Program / Functions

No. of speeds

Time-setting options



Technical Features







No. of lights 2 LED Light type 2 W **Light Power** Light color temperature 4000 K

scale (K)

Free outlet maximum

capacity

140 W Motor power

Minimum distance from **GAS** hob 600 m³/h

Vent outlet

indicator

Minimum distance from

ELECTRIC hob

Anti-grease filters

Filter replacement

Aluminium Yes

150 mm 650 mm

500 mm

No. of filters	2	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	250	47



Speed 2	380	56
Speed 3	570	65

Accessories included

Tube reduction Yes

Performance / Energy Label

C 7

Annual Efficiency 82 kWh/a Airbourne acouistical A- 47 dBA

Consumption (AEChood) weighted sound Power Energy efficiency class C Emission at minimum speed (SPEmin)

Fluid Dynamic Efficiency 17,00 Airborne acoustical A- 65 dBA

(FDE) weighted sound Power
Fluid Dynamic Efficiency D
class (FDEC) Emission at maximum
speed (SPEmax)

Lighting Efficiency (LE) 77,0 lux/W Time increase factor (F) 1,4

Lighting Efficiency Class A

Lighting Efficiency Class A

Measured air flow rate 335 m³/h

(LEC) Measured air flow rate
Grease Filtering 75,1 % at best efficiency point

Efficiency (GFE) (Qbep)

Grease Filtering C
Efficiency Class (GFEC)

Measured air pressure 288 Pa
at best efficiency point

Air flow at minumum 250 m³/h

mand (Omin) (Pbep)

Measured electric 158 W

speed (Qmin)

Air flow at maximum 570 m³/h
speed (Qmax)

Medsured electric 158 W
power input at best
efficiency point (Wbep)
Nominal Power 2 W

consumption of the light
system (WL)

Average illumination of 170 lux

the light on the cooking surface (Emiddle) Sound power level at 65 dBA

highest setting (Lwa)


Electrical Connection

Electrical connection 142 W Power supply cable 1500 mm

rating length

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz



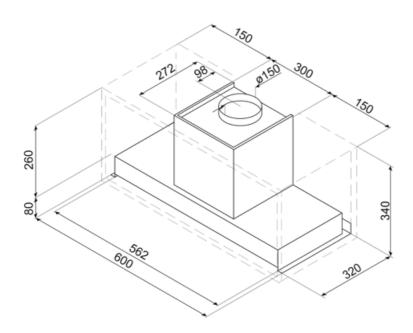



Compatible Accessories

KITFC61

charcoal filter for KSGT61X





Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

C | K ---