

# KSGT61X

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709322069
Hood width	56 cm



## Aesthetics

Aesthetic	Universale	Finishing	Satin
Colour	Stainless steel	Logo	Silk screen




## Controls

Control setting	Control knobs
-----------------	---------------

## Programme / Functions

No. of speeds	3
Time-setting options	

## Technical Features

				
No. of lights	2	Anti-grease filters	Aluminium	
Light type	LED	Filter replacement indicator	Yes	
Light Power	2 W	Vent outlet	150 mm	
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm	
Free outlet maximum capacity	600 m³/h	Minimum distance from ELECTRIC hob	500 mm	
Motor power	140 W	Non return valve	Yes	
No. of filters	2			

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	250	47
Speed 2	380	56
Speed 3	570	65

## Accessories Included

Tube reduction Yes

## Performance / Energy Label




**Annual Efficiency Consumption (AEChood)** 82 kWh/a  
**Energy efficiency class (EEC)** C  
**Fluid Dynamic Efficiency (FDE)** 17.00  
**Fluid Dynamic Efficiency class (FDEC)** D  
**Lighting Efficiency (LE)** 77.0 lux/W  
**Lighting Efficiency Class (LEC)** A  
**Grease Filtering Efficiency (GFE)** 75.1 %  
**Grease Filtering Efficiency Class (GFEC)** C  
**Air flow at minumum speed (Qmin)** 250 m³/h  
**Air flow at maximum speed (Qmax)** 570 m³/h

**Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)** 47 dB(A)  
**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)** 65 dB(A)  
**Time increase factor (F)** 1.4  
**Energy Efficiency Index** 51.7  
**Measured air flow rate at best efficiency point (Qbep)** 335 m³/h  
**Measured air pressure at best efficiency point (Pbep)** 288 Pa  
**Measured electric power input at best efficiency point (Wbep)** 158 W  
**Nominal Power consumption of the light system (WL)** 2 W  
**Average illumination of the light on the cooking surface (Emiddle)** 170 lux  
**Sound power level at highest setting (Lwa)** 65 dB(A)

## Electrical Connection

**Electrical connection rating** 142 W  
**Voltage** 220-240 V

**Frequency (Hz)** 50-60 Hz  
**Power supply cable length** 1500 mm

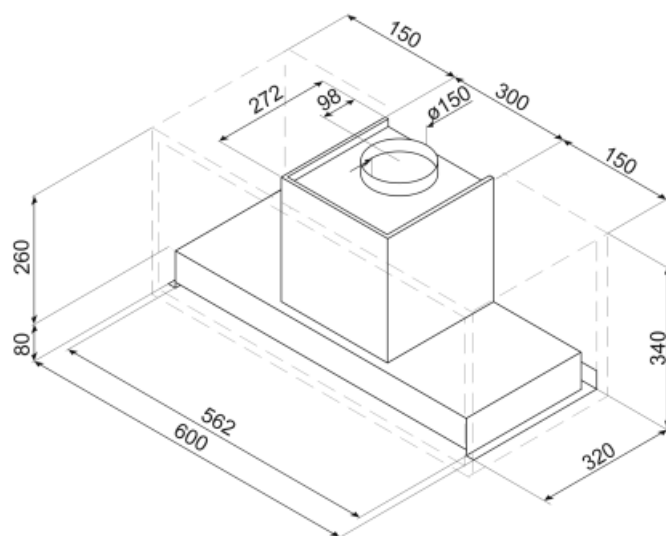

---

## Not included accessories

---



**KITFC61**

charcoal filter for KSGT61X

---

## Symbols glossary (TT)

---



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



C: Product energy rating



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.