KSGT61X



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709322069
Hood width	56 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen

Controls

Control setting	Control knobs

Program / Functions

No. of speeds	3
Time-setting options	

Technical Features

No. of lights	2	**No. of filters**	2
Light type	LED	**Anti-grease filters**	Aluminium
Light Power	2 W	**Filter replacement indicator**	Yes
Light color temperature (K)	4000 K	**Vent outlet**	150 mm
Free outlet maximum capacity	600 m³/h	**Minimum distance from GAS hob**	650 mm
Motor power	140 W	**Minimum distance from ELECTRIC hob**	500 mm

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	250	47

Speed 2	380	56
Speed 3	570	65

Accessories included

Tube reduction	Yes


Performance / Energy Label




Annual Efficiency Consumption (AEChood)	82 kWh/a
Energy efficicency class (EEC)	C
Fluid Dynamic Efficiency (FDE)	17.00
Fluid Dynamic Efficiency class (FDEC)	D
Lighting Efficiency (LE)	77.0 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	75.1 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	250 m³/h
Air flow at maximum speed (Qmax)	570 m³/h
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Time increase factor (F)	1.4
Energy Efficiency Index	51.7
Measured air flow rate at best efficiency point (Qbep)	335 m³/h
Measured air pressure at best efficiency point (Pbep)	288 Pa
Measured electric power input at best efficiency point (Wbep)	158 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	170 lux
Sound power level at highest setting (Lwa)	65 dBA

Electrical Connection

Electrical connection rating	142 W
Voltage	220-240 V
Frequency (Hz)	50-60 Hz
Power supply cable length	1500 mm
Plug	Not present

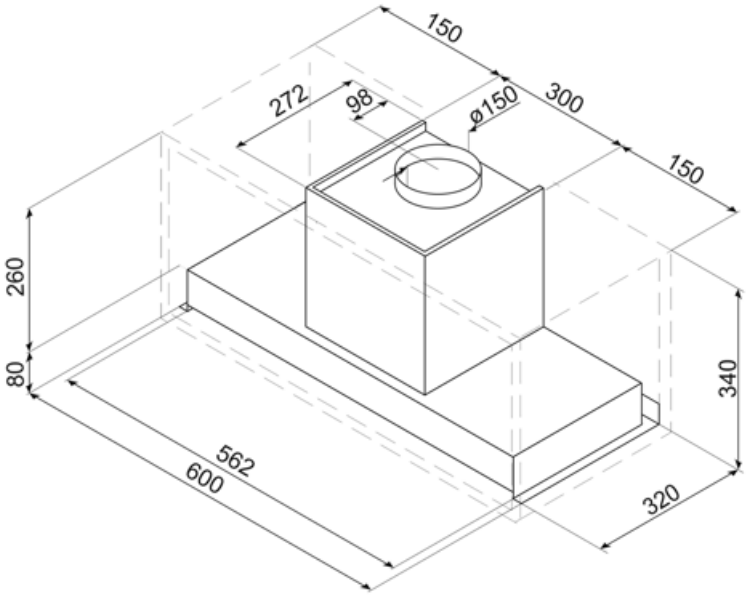
150
272
98
ø150
300
150
260
80
340
562
600
320

Compatible Accessories



KITFC61

charcoal filter for KSGT61X

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.