

# KSGT61X

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709322069
Hood width	56 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Silk screen




## Controls

Control setting	Control knobs
-----------------	---------------

## Program / Functions

No. of speeds	3
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Filter replacement indicator	Yes
Light Power	2 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	600 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	140 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	250	47

Speed 2	380	56
Speed 3	570	65

## Accessories included

Tube reduction Yes


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	82 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class (EEC)	C	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Fluid Dynamic Efficiency (FDE)	17,00	Time increase factor (F)	1,4
Fluid Dynamic Efficiency class (FDEC)	D	Energy Efficiency Index	51,7
Lighting Efficiency (LE)	77,0 lux/W	Measured air flow rate at best efficiency point (Qbep)	335 m³/h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	288 Pa
Grease Filtering Efficiency (GFE)	75,1 %	Measured electric power input at best efficiency point (Wbep)	158 W
Grease Filtering Efficiency Class (GFEC)	C	Nominal Power consumption of the light system (WL)	2 W
Air flow at minumum speed (Qmin)	250 m³/h	Average illumination of the light on the cooking surface (Emiddle)	170 lux
Air flow at maximum speed (Qmax)	570 m³/h	Sound power level at highest setting (Lwa)	65 dBA

## Electrical Connection

Electrical connection rating	142 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

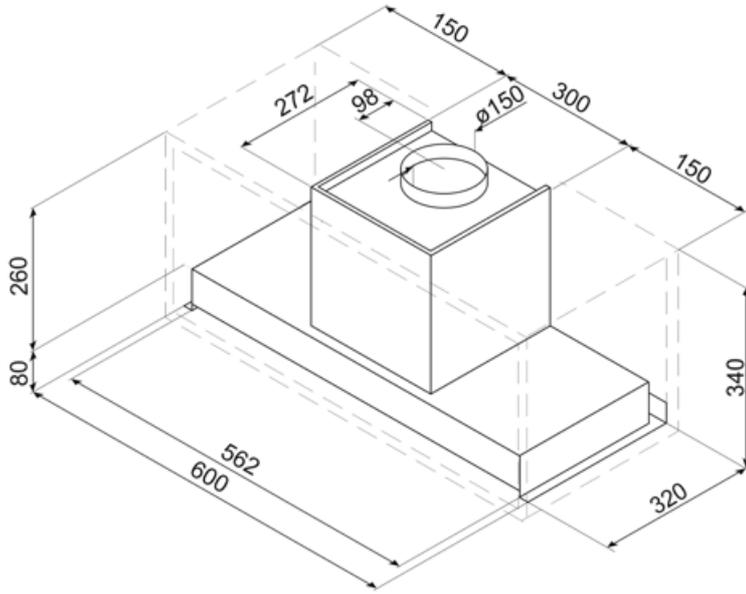

---

## Compatible Accessories

---

**KITFC61**

charcoal filter for KSGT61X



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.