

# KSGT61X

|                    |                  |
|--------------------|------------------|
| Product family     | Hood             |
| Hood Type          | Integrated hood  |
| Design             | Fully integrated |
| Extraction         | Extraction       |
| Electronic control | Yes              |
| Material           | Stainless steel  |
| Type of steel      | Brushed          |
| EAN code           | 8017709322069    |
| Hood width         | 56 cm            |
| Aesthetic          | Universale       |
| Colour             | Stainless steel  |
| Finishing          | Satin            |
| Logo               | Silk screen      |




## Controls

|                 |               |
|-----------------|---------------|
| Control setting | Control knobs |
|-----------------|---------------|

## Program / Functions

|                      |   |
|----------------------|---|
| No. of speeds        | 3   |
| Time-setting options |  |

## Technical Features



|                                   |                       |                                    |           |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights                     | 2                     | Anti-grease filters                | Aluminium |
| Light type                        | LED                   | Filter replacement indicator       | Yes       |
| Light Power                       | 2 W                   | Vent outlet                        | 150 mm    |
| Light color temperature scale (K) | 4000 K                | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity      | 600 m <sup>3</sup> /h | Minimum distance from ELECTRIC hob | 500 mm    |
| Motor power                       | 140 W                 | Non return valve                   | Yes       |
| No. of filters                    | 2                     |                                    |           |

|         | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 250   | 47                               |

|         |     |    |
|---------|-----|----|
| Speed 2 | 380 | 56 |
| Speed 3 | 570 | 65 |

## Accessories included


Tube reduction Yes

## Performance / Energy Label

|  |  |          |  |          |
|--|--|----------|--|----------|
|  | <b>Annual Efficiency Consumption (AEChood)</b> | 82 kWh/a | <b>Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)</b> | 47 dBA   |
| <b>Energy efficicency class (EEC)</b>  | C  |          | <b>Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)</b>  | 65 dBA   |
| <b>Fluid Dynamic Efficiency (FDE)</b>  | 17,00  |          | <b>Time increase factor (F)</b>  | 1,4      |
| <b>Fluid Dynamic Efficiency class (FDEC)</b>                                     | D  |          | <b>Energy Efficiency Index</b>   | 51,7     |
| <b>Lighting Efficiency (LE)</b>  | 77,0 lux/W                                     |          | <b>Measured air flow rate at best efficiency point (Qbep)</b>                          | 335 m³/h |
| <b>Lighting Efficiency Class (LEC)</b>   | A  |          | <b>Measured air pressure at best efficiency point (Pbep)</b>                           | 288 Pa   |
| <b>Grease Filtering Efficiency (GFE)</b>   | 75,1 %   |          | <b>Measured electric power input at best efficiency point (Wbep)</b>                   | 158 W    |
| <b>Grease Filtering Efficiency Class (GFEC)</b>                                  | C  |          | <b>Nominal Power consumption of the light system (WL)</b>                              | 2 W      |
| <b>Air flow at minumum speed (Qmin)</b>  | 250 m³/h                                       |          | <b>Average illumination of the light on the cooking surface (Emiddle)</b>              | 170 lux  |
| <b>Air flow at maximum speed (Qmax)</b>  | 570 m³/h                                       |          | <b>Sound power level at highest setting (Lwa)</b>                                      | 65 dBA   |

## Electrical Connection

|                                     |           |                                  |             |
|-------------------------------------|-----------|----------------------------------|-------------|
| <b>Electrical connection rating</b> | 142 W     | <b>Power supply cable length</b> | 1500 mm     |
| <b>Voltage</b>                      | 220-240 V | <b>Plug</b>                      | Not present |
| <b>Frequency (Hz)</b>               | 50-60 Hz  |                                  |             |

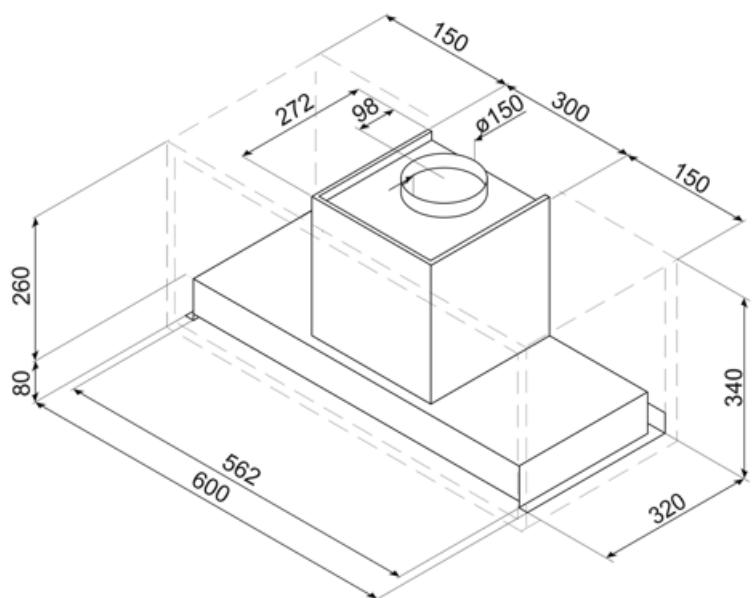



---

## Compatible Accessories

---

**KITFC61**

charcoal filter for KSGT61X



## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Switch off automatically:** A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.