

KSGT63X

Product family

Hood Type Integrated hood Fully integrated Design Extraction Extraction

Hood

Electronic control Yes

Material Stainless steel Type of steel Brushed

EAN code 8017709312138

Hood width 60 cm **Aesthetic** Universale Colour Stainless steel

White

Finishing Satin Logo **Embossed**



Aluminium

500 mm

Yes

Controls

White Control setting Touch control back-lighted Led color

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options







Technical Features









No. of lights Light type LED **Light Power** 1,3 W Dimmer mode Yes Light color temperature

scale (K)

Free outlet maximum

capacity

Motor power

2

indicator Vent outlet 150 mm 4000 K Minimum distance from 650 mm GAS hob 730 m³/h

Minimum distance from 230 W

ELECTRIC hob

No. of filters

Anti-grease filters

Filter replacement

Non return valve Yes

SMEG SPA 30/11/2025



| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704- 2-13 [dBA] |
|-----------------|-------------------------------------|--------------------------------------|
| Speed 1 | 265 | 47 |
| Speed 2 | 365 | 54 |
| Speed 3 | 482 | 61 |
| Intensive speed | 716 | 70 |

Performance / Energy Label

A P

Annual Efficiency 53 kWh/a Consumption (AEChood) Energy efficieency class A (EEC) Fluid Dynamic Efficiency 31,3 (FDE) Fluid Dynamic Efficiency A

class (FDEC)

Lighting Efficiency (LE) 75,0 lux/W

Lighting Efficiency Class A (LEC)

Grease Filtering

84.9 % Efficiency (GFE) **Grease Filtering**

Efficiency Class (GFEC)

Air flow at minumum 270 m³/h speed (Qmin)

482 m³/h

Air flow at maximum speed (Qmax)

Air flow at boost speed 716 m³/h

(Qboost)

Airbourne acouistical A- 47 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-62 dBA weighted sound Power

Emission at maximum speed (SPEmax)

Airbourne acoustical A- 70 dBA

weighted sound power emission at boost speed (SPEboost)

Time increase factor (F) **Energy Efficiency Index** 51.7 Measured air flow rate 388 m³/h

at best efficiency point (Qbep)

Measured air pressure at best efficiency point

(Pbep)

Measured electric power input at best efficiency point (Wbep)

Nominal Power 3 W

consumption of the light system (WL)

Average illumination of the light on the cooking

surface (Emiddle) Sound power level at

highest setting (Lwa)

195 lux

450 Pa

155 W

62 dBA

1500 mm

Electrical Connection

Electrical connection 233 W

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz


Power supply cable

length

Plug Not present

SMEG SPA 30/11/2025



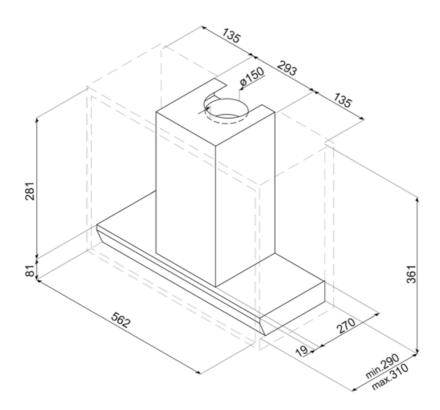

SMEG SPA 30/11/2025



Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT63

regenerable and dishwasher safe charcoal filter for KSGT63X hoods

SMEG SPA 30/11/2025



Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights

SMEG SPA 30/11/2025