


KSGT74X






Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328351
Hood width	75 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed

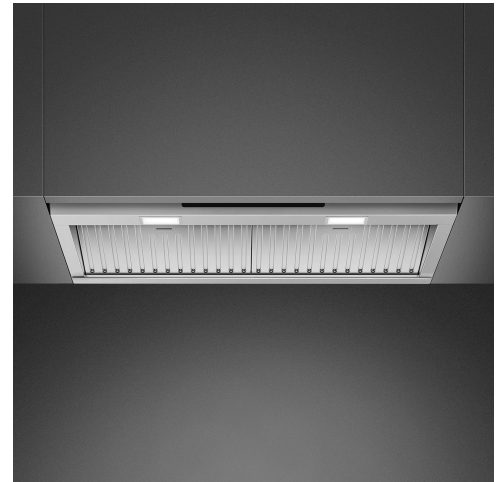






Controls

Control setting	Touch control back-lighted White	Led color	White
------------------------	-------------------------------------	------------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System	

Technical Features

						
No. of lights	2	No. of filters	2			
Light type	LED	Anti-grease filters	Stainless steel			
Light Power	2.3 W	Filter replacement indicator	Yes			
Dimmer mode	Yes	Vent outlet	150 mm			
Light color temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm			
Free outlet maximum capacity	820 m ³ /h	Minimum distance from ELECTRIC hob	500 mm			

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	254	48
Speed 2	442	61
Speed 3	603	68
Intensive speed	657	70


Performance / Energy Label



Annual Efficiency Consumption (AEChood)	48 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	69 dBA
Fluid Dynamic Efficiency (FDE)	30.3	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.9
Lighting Efficiency (LE)	42.6 lux/W	Energy Efficiency Index	51.8
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	329 m ³ /h
Grease Filtering Efficiency (GFE)	87.2 %	Measured air pressure at best efficiency point (Pbep)	448 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (Wbep)	135 W
Air flow at minumum speed (Qmin)	254 m ³ /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	603 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	196 lux
Air flow at boost speed (Qboost)	657 m ³ /h	Sound power level at highest setting (Lwa)	69 dBA

Electrical Connection

Electrical connection rating	280 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

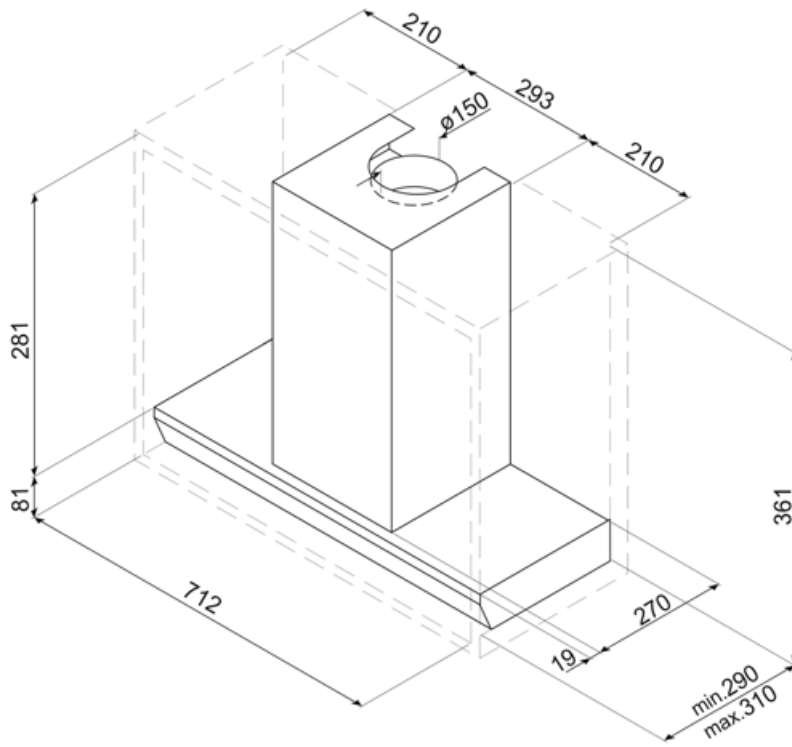

Compatible Accessories














KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT74

Symbols glossary

- | | | | |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Energy efficiency class A |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Intensive/turbo setting: when extra fast extraction is required. |  | Connection between hob and hood |
|  | Dimmering Lights |  | Tunable white from warm to cold. |
|  | V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use. | | |