KSGT74X

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709328351
Hood width	75 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



Controls

Control setting	Touch control back-lighted White	**Led color**	White

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System	

Technical Features

No. of lights	2	**No. of filters**	2
Light type	LED	**Anti-grease filters**	Stainless steel
Light Power	2.3 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light color temperature range	2700 - 4000 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	820 m³/h	**Minimum distance from ELECTRIC hob**	500 mm

Motor power	275 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	254	48
Speed 2	442	61
Speed 3	603	68
Intensive speed	657	70

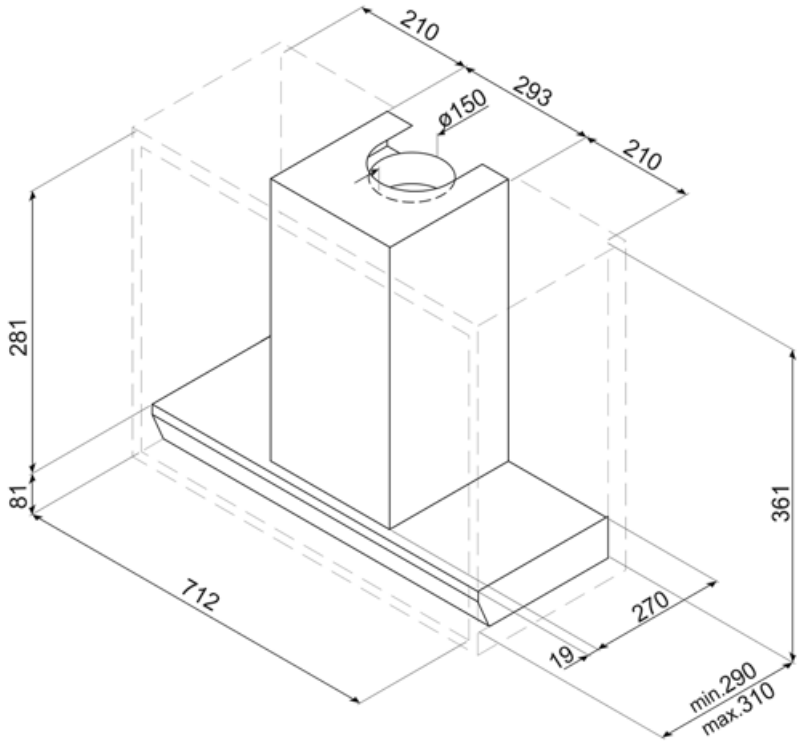
Performance / Energy Label



Annual Efficiency Consumption (AEChood)	48 kWh/a	**Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)**	48 dBA
Energy efficicency class (EEC)	A	**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)**	69 dBA
Fluid Dynamic Efficiency (FDE)	30.3	**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)**	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	**Time increase factor (F)**	0.9
Lighting Efficiency (LE)	42.6 lux/W	**Energy Efficiency Index**	51.8
Lighting Efficiency Class (LEC)	A	**Measured air flow rate at best efficiency point (Qbep)**	329 m³/h
Grease Filtering Efficiency (GFE)	87.2 %	**Measured air pressure at best efficiency point (Pbep)**	448 Pa
Grease Filtering Efficiency Class (GFEC)	B	**Measured electric power input at best efficiency point (Wbep)**	135 W
Air flow at minumum speed (Qmin)	254 m³/h		
Air flow at maximum speed (Qmax)	603 m³/h	**Nominal Power consumption of the light system (WL)**	5 W
Air flow at boost speed (Qboost)	657 m³/h	**Average illumination of the light on the cooking surface (Emiddle)**	196 lux
		Sound power level at highest setting (Lwa)	69 dBA

Electrical Connection

Electrical connection rating	280 W	**Power supply cable length**	1500 mm
Voltage	220-240 V	**Plug**	Not present
Frequency (Hz)	50-60 Hz		


210
293
210
ø150
281
81
712
361
270
19
min.290
max.310

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITFCGT74

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Connection between hob and hood



Energy efficiency class A



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Dimmering Lights



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Tunable white from warm to cold.