


# KSGT93X




Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709312145
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



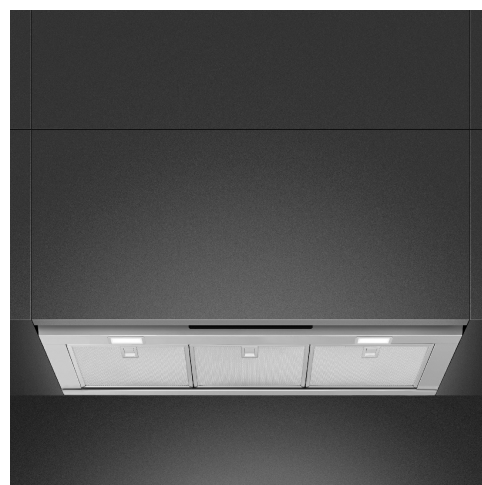



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

## Technical Features

			
No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light Power	1.3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature scale (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	730 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	265	47
Speed 2	360	56
Speed 3	477	62
Intensive speed	714	71

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 52 kWh/a

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 30,9

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 60,8 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 83,1 %

Grease Filtering Efficiency Class (GFEC) C

Air flow at mininum speed (Qmin) 265 m³/h

Air flow at maximum speed (Qmax) 477 m³/h

Air flow at boost speed (Qboost) 714 m³/h

Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin) 47 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 63 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 71 dBA

Power consumption in stand-by mode (Ps) 0,49 W

Time increase factor (F) 0,9

Energy Efficiency Index 51,7

Measured air flow rate at best efficiency point (Qbep) 383 m³/h

Measured air pressure at best efficiency point (Pbep) 446 Pa

Measured electric power input at best efficiency point (Wbep) 154 W

Nominal Power consumption of the light system (WL) 3 W

Average illumination of the light on the cooking surface (Emiddle) 158 lux

Sound power level at highest setting (Lwa) 63 dBA

## Electrical Connection


Plug Not present

Electrical connection rating 233 W

Voltage 220-240 V

Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm

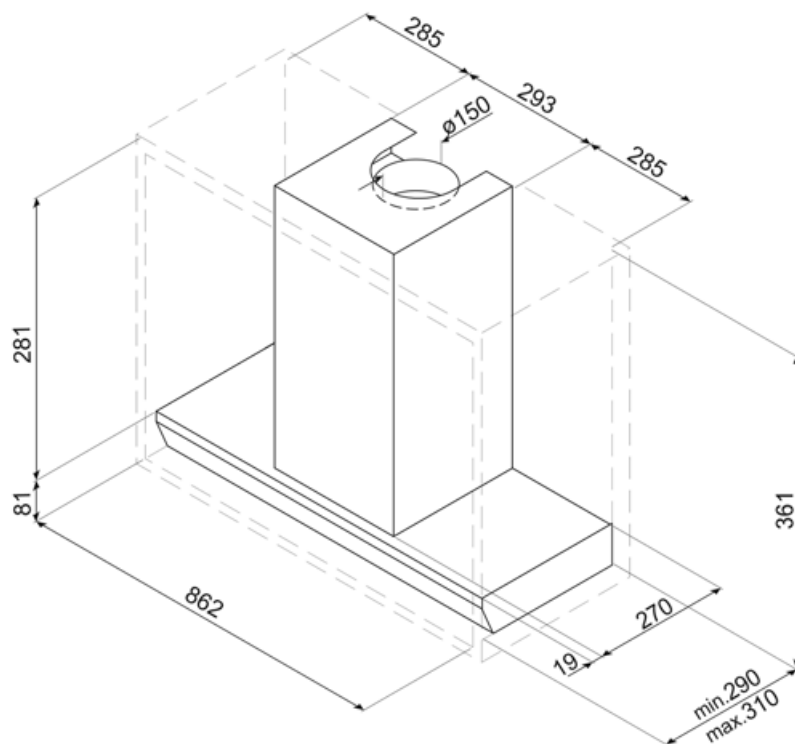

---


## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCGT93

## Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights

---

## Benefit (TT)

---

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display