KSGT94XV



Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709349158
Hood width	90 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed

Controls

Control setting	Touch control back-lighted White	**Led color**	White

Program / Functions

No. of speeds	3
Intensive speed	BOOST
24h air filter function	24
Time-setting options	
Auto-vent 2.0	
V-Condense System PRO	

Technical Features

No. of lights	1	**No. of filters**	3
Light type	LED	**Anti-grease filters**	Stainless steel
Light Power	2,3 W	**Filter replacement indicator**	Yes
Dimmer mode	Yes	**Vent outlet**	150 mm
Light color temperature range	2700 - 4000 K	**Minimum distance from GAS hob**	650 mm
Free outlet maximum capacity	820 m³/h	**Minimum distance from ELECTRIC hob**	500 mm

Motor power	275 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	49
Speed 2	407	65
Speed 3	616	68
Intensive speed	703	71

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	55 kWh/a	**Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)**	67 dBA
Energy efficicency class (EEC)	A	**Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)**	69 dBA
Fluid Dynamic Efficiency (FDE)	31,7	**Time increase factor (F)**	0,9
Fluid Dynamic Efficiency class (FDEC)	A	**Energy Efficiency Index**	53,3
Lighting Efficiency (LE)	52 lux/W	**Measured air flow rate at best efficiency point (Qbep)**	389 m³/h
Lighting Efficiency Class (LEC)	A	**Measured air pressure at best efficiency point (Pbep)**	455 Pa
Grease Filtering Efficiency (GFE)	73,8 %	**Measured electric power input at best efficiency point (Wbep)**	155 W
Air flow at minumum speed (Qmin)	314 m³/h	**Nominal Power consumption of the light system (WL)**	6,1 W
Air flow at maximum speed (Qmax)	657 m³/h	**Average illumination of the light on the cooking surface (Emiddle)**	315 lux
Air flow at boost speed (Qboost)	784 m³/h	**Sound power level at highest setting (Lwa)**	67 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		

Electrical Connection

Voltage	220-240 V	**Power supply cable length**	1500 mm
Frequency (Hz)	50-60 Hz	**Plug**	Not present

Also available

Alternative colours available	Matt Black, No

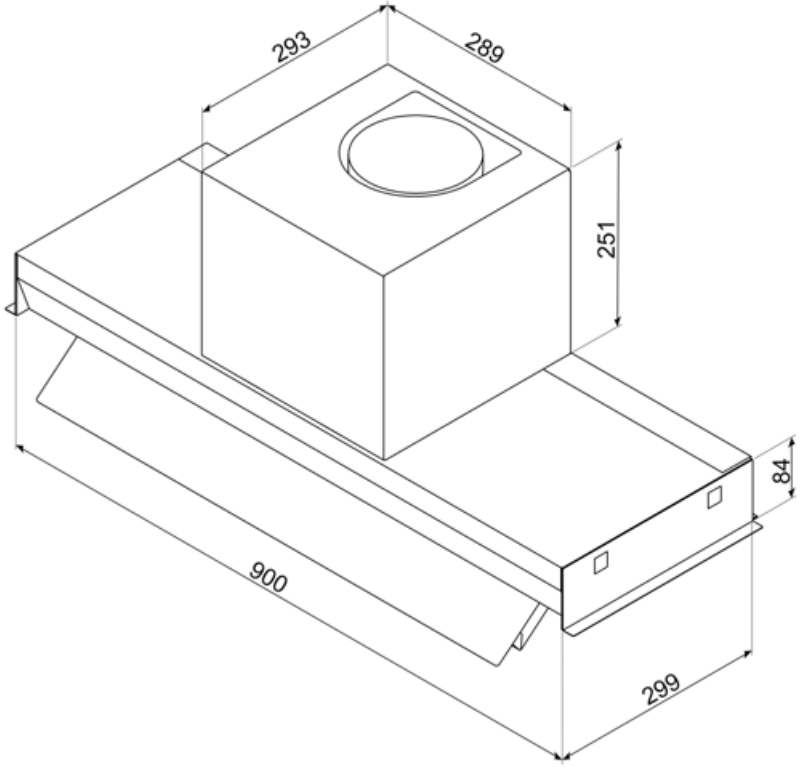

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Connection between hob and hood



Energy efficiency class A



Warning light(s): to advise when filters need changing.



Tunable white from warm to cold.



V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Dimmering Lights



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.