

# KSGT94XV

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709349158
Hood width	90 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Logo	Embossed



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	
V-Condense System PRO	

## Technical Features



No. of lights	1	No. of filters	3
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2,3 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	49
Speed 2	407	65
Speed 3	616	68
Intensive speed	703	71

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	55 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency (FDE)	31,7	Time increase factor (F)	0,9
Fluid Dynamic Efficiency class (FDEC)	A	Energy Efficiency Index	53,3
Lighting Efficiency (LE)	52 lux/W	Measured air flow rate at best efficiency point (Qbep)	389 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	455 Pa
Grease Filtering Efficiency (GFE)	73,8 %	Measured electric power input at best efficiency point (Wbep)	155 W
Air flow at minumum speed (Qmin)	314 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	6,1 W
Air flow at maximum speed (Qmax)	657 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	315 lux
Air flow at boost speed (Qboost)	784 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	48 dBA		


## Electrical Connection

Voltage	220-240 V	Power supply cable length	1500 mm
Frequency (Hz)	50-60 Hz	Plug	Not present

## Also available

Alternative colours  
available

Matt Black, No

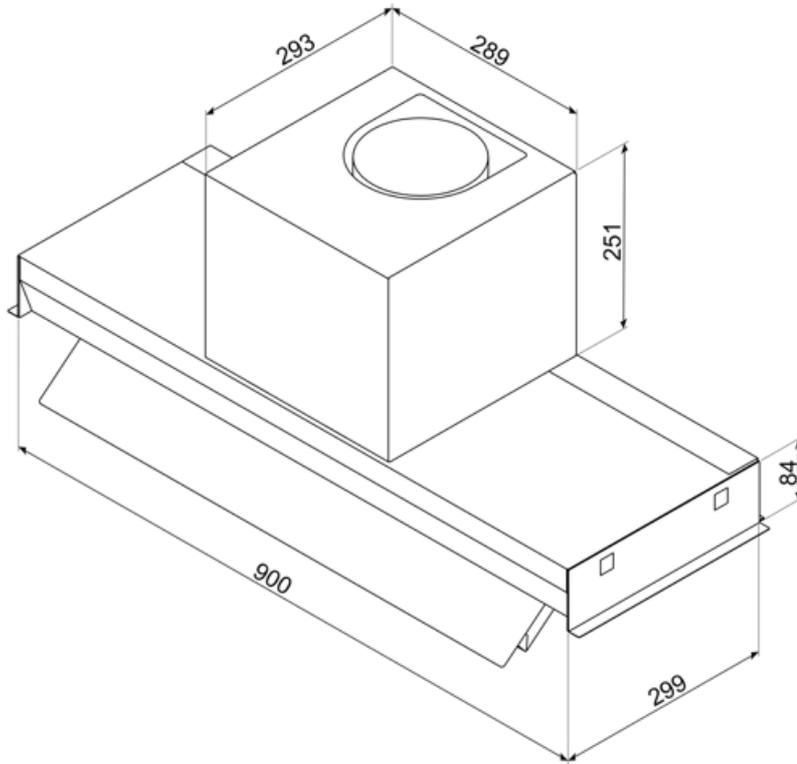

## Symbols glossary

- |  |   |   |  |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.                            |
|  | Energy efficiency class A   |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Warning light(s): to advise when filters need changing.   |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.                      |
|  | Intensive/turbo setting: when extra fast extraction is required.  |  | Connection between hob and hood  |
|  | Dimmering Lights  |  | Tunable white from warm to cold.   |
|  | V-Condense System is a system that avoids the drips of condensation that you could show up on the hood within certain circumstance of use.                |   |  |