KSIV960XE

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201654
Hood width	100 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Glass Type	Clear
Serigraphy colour	Black
Logo	Embossed



Controls

Control setting	Electronic buttons

Program / Functions

No. of speeds	3
Intensive speed	BOOST

Technical Features

No. of lights	4	**No. of filters**	1
Light type	LED	**Anti-grease filters**	Stainless steel
Light Power	2 W	**Filter replacement indicator**	Yes
Free outlet maximum capacity	715 m³/h	**Vent outlet**	150 mm
Motor power	310 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	320	54
Speed 2	448	63
Speed 3	603	71
Intensive speed	691	74

Performance / Energy Label



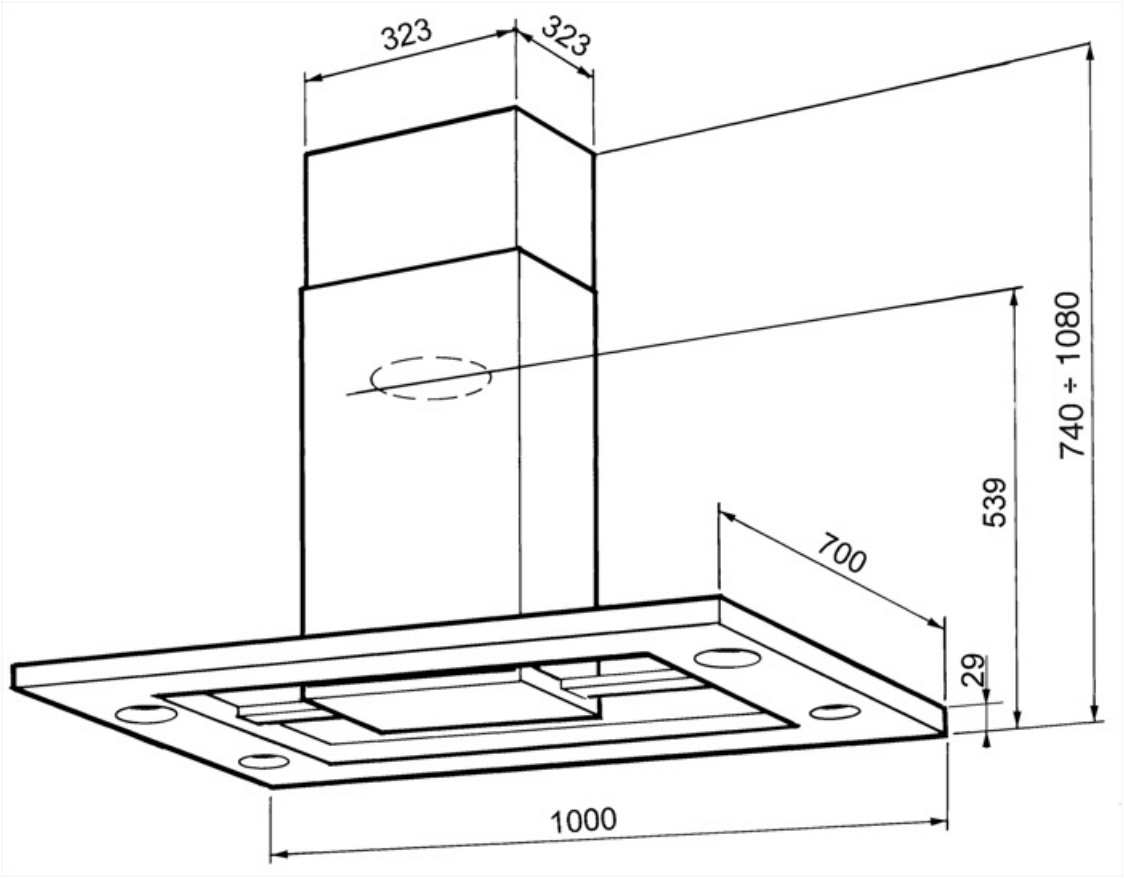
Annual Efficiency Consumption (AEChood)	62 kWh/a
Energy efficicency class (EEC)	B
Fluid Dynamic Efficiency (FDE)	28,4
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	29 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	86 %
Grease Filtering Efficiency Class (GFEC)	B
Air flow at minumum speed (Qmin)	320 m³/h
Air flow at maximum speed (Qmax)	603 m³/h
Air flow at boost speed (Qboost)	691 m³/h
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	54 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	71 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	74 dBA
Time increase factor (F)	1,00
Measured air flow rate at best efficiency point (Qbep)	352 m³/h
Measured air pressure at best efficiency point (Pbep)	434 Pa
Measured electric power input at best efficiency point (Wbep)	150 W
Nominal Power consumption of the light system (WL)	10 W
Average illumination of the light on the cooking surface (Emiddle)	290 lux
Sound power level at highest setting (Lwa)	71 dBA

Electrical Connection

Electrical connection rating	320 W
Current	1 A
Voltage	220-240 V
Frequency (Hz)	50 Hz
Power supply cable length	1500 mm
Plug	Not present

Optional accessories

Charcoal filter	KITFC900


323
323
740 ÷ 1080
539
700
29
1000

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

