

KSIV960XE

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201654
Hood width	100 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Glass Type	Clear
Serigraphy colour	Black
Logo	Embossed




Controls

Control setting	Electronic buttons
-----------------	--------------------

Program / Functions

No. of speeds	3
Intensive speed	

Technical Features



No. of lights	4	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2 W	Filter replacement indicator	Yes
Free outlet maximum capacity	715 m ³ /h	Vent outlet	150 mm
Motor power	310 W	Non return valve	Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	320	54
Speed 2	448	63
Speed 3	603	71
Intensive speed	691	74

Performance / Energy Label




Annual Efficiency Consumption (AEC_{hood})	62 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE_{min})	54 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE_{max})	71 dBA
Fluid Dynamic Efficiency (FDE)	28,4	Airbourne acoustical A-weighted sound power emission at boost speed (SPE_{boost})	74 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	1,00
Lighting Efficiency (LE)	29 lux/W	Measured air flow rate at best efficiency point (Q_{bep})	352 m ³ /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (P_{bep})	434 Pa
Grease Filtering Efficiency (GFE)	86 %	Measured electric power input at best efficiency point (W_{bep})	150 W
Grease Filtering Efficiency Class (GFEC)	B	Nominal Power consumption of the light system (WL)	10 W
Air flow at minumum speed (Q_{min})	320 m ³ /h	Average illumination of the light on the cooking surface (E_{middle})	290 lux
Air flow at maximum speed (Q_{max})	603 m ³ /h	Sound power level at highest setting (L_{wa})	71 dBA
Air flow at boost speed (Q_{boost})	691 m ³ /h		

Electrical Connection

Electrical connection rating	320 W	Frequency (Hz)	50 Hz
Current	1 A	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present

Optional accessories

Charcoal filter	KITFC900
------------------------	----------

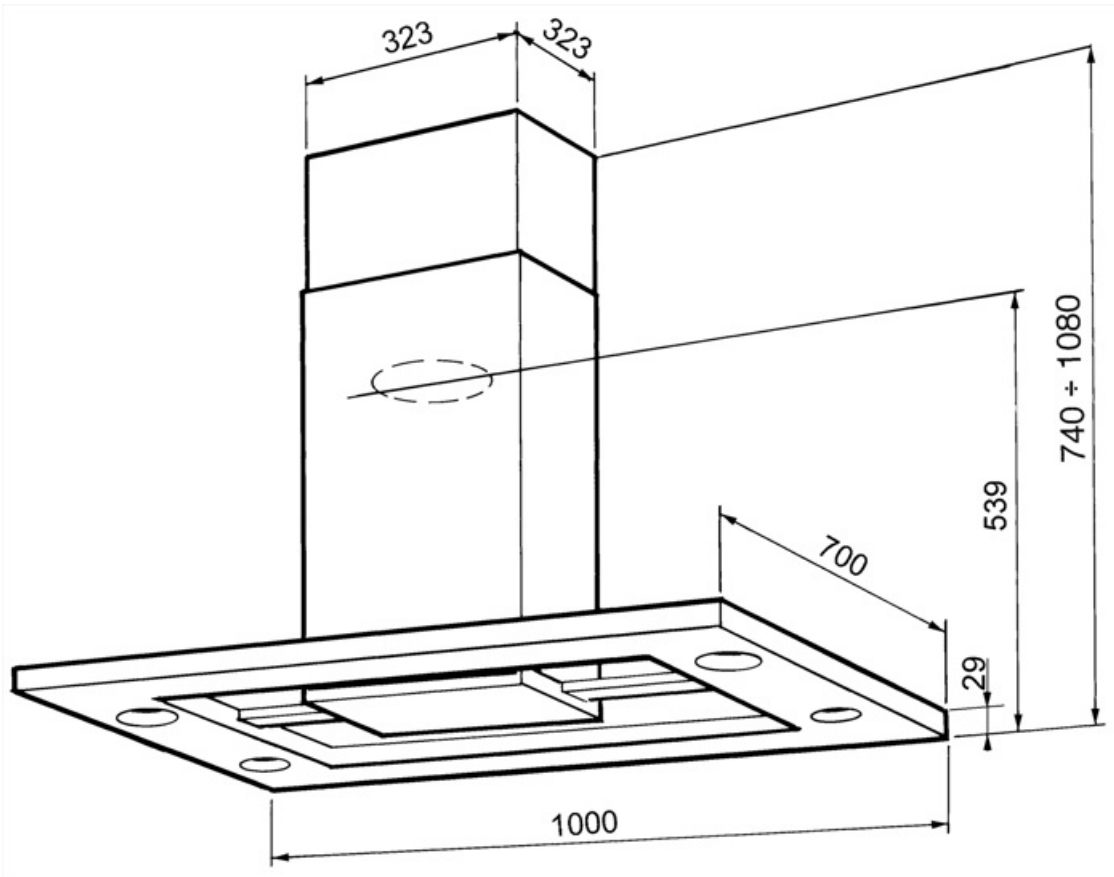

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.