

KSIV960XE

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201654
Hood width	100 cm



Aesthetics

Aesthetic	Universale	Glass Type	Clear
Colour	Stainless steel	Serigraphy colour	Black
Finishing	Satin	Logo	Embossed




Controls

Control setting	Electronic buttons
-----------------	--------------------

Programs / Functions

No. of speeds	3
Intensive speed	

Technical Features

				
No. of lights	4	No. of filters	1	
Light type	LED	Anti-grease filters	Stainless steel	
Light Power	2 W	Filter replacement indicator	Yes	
Free outlet maximum capacity	715 m³/h	Vent outlet	150 mm	
Motor power	310 W	Non return valve	Yes	

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	320	54
Speed 2	448	63
Speed 3	603	71
Intensive speed	691	74

Performance / Energy Label

B

Annual Efficiency Consumption (AEChood) 62 kWh/a
Energy efficiency class (EEC) B
Fluid Dynamic Efficiency (FDE) 28.4
Fluid Dynamic Efficiency class (FDEC) A
Lighting Efficiency (LE) 29 lux/W
Lighting Efficiency Class (LEC) A
Grease Filtering Efficiency (GFE) 86 %
Grease Filtering Efficiency Class (GFEC) B
Air flow at minumum speed (Qmin) 320 m³/h
Air flow at maximum speed (Qmax) 603 m³/h
Air flow at boost speed (Qboost) 691 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 54 dB(A)
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 71 dB(A)
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 74 dB(A)
Power consumption in stand-by mode (Ps) 0.49 W
Time increase factor (F) 1.00
Measured air flow rate at best efficiency point (Qbep) 352 m³/h
Measured air pressure at best efficiency point (Pbep) 434 Pa
Measured electric power input at best efficiency point (Wbep) 150 W
Nominal Power consumption of the light system (WL) 10 W
Average illumination of the light on the cooking surface (Emiddle) 290 lux
Sound power level at highest setting (Lwa) 71 dB(A)

Electrical Connection


Electrical connection rating 320 W
Current 1 A
Voltage 220-240 V

Frequency (Hz) 50 Hz
Power supply cable length 1500 mm

Optional accessories

Charcoal filter

KITFC900

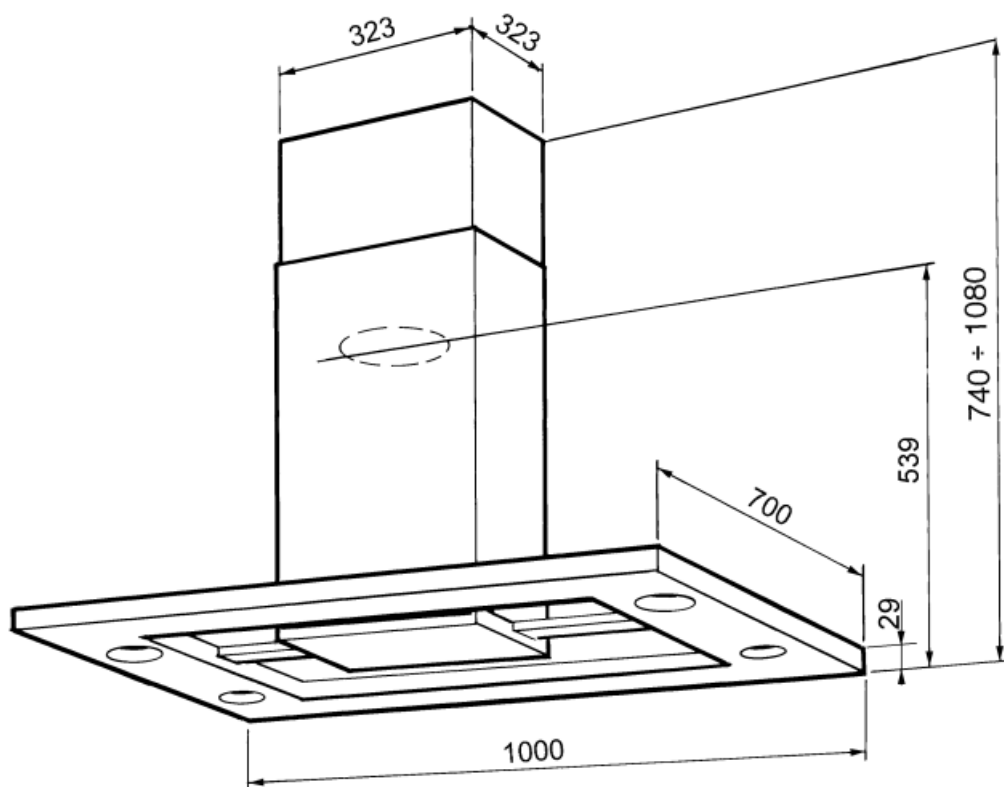

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Warning light(s): to advise when filters need changing.



Intensive/turbo setting: when extra fast extraction is required.



B: Product energy rating, measured from A+++ to D / G depending on the product family.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.