

# KSIV960XE

Product family	Hood
Hood Type	Decorative island hood
Design	T flat
Extraction	Extraction
Electronic control	Yes
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709201654
Hood width	100 cm



## Aesthetics

Aesthetic	Universale	Glass Type	Clear
Colour	Stainless steel	Serigraphy colour	Black
Finishing	Satin	Logo	Embossed


## Controls

Control setting	Electronic buttons
-----------------	--------------------

## Programs / Functions main oven

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	4	No. of filters	1
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2 W	Filter replacement indicator	Yes
Free outlet maximum capacity	715 m <sup>3</sup> /h	Vent outlet	150 mm
Motor power	310 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	320	54
Speed 2	448	63
Speed 3	603	71
Intensive speed	691	74

## Performance / Energy Label



Annual Efficiency Consumption (AEC <sub>hood</sub> )	62 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPE <sub>min</sub> )	54 dBA
Energy efficiency class (EEC)	B	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPE <sub>max</sub> )	71 dBA
Fluid Dynamic Efficiency (FDE)	28,4	Airbourne acoustical A-weighted sound power emission at boost speed (SPE <sub>boost</sub> )	74 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (P <sub>s</sub> )	0,49 W
Lighting Efficiency (LE)	29 lux/W	Time increase factor (F)	1,00
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Q <sub>bep</sub> )	352 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	86 %	Measured air pressure at best efficiency point (P <sub>bep</sub> )	434 Pa
Grease Filtering Efficiency Class (GFEC)	B	Measured electric power input at best efficiency point (W <sub>bep</sub> )	150 W
Air flow at mininum speed (Q <sub>min</sub> )	320 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	10 W
Air flow at maximum speed (Q <sub>max</sub> )	603 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (E <sub>middle</sub> )	290 lux
Air flow at boost speed (Q <sub>boost</sub> )	691 m <sup>3</sup> /h	Sound power level at highest setting (L <sub>wa</sub> )	71 dBA


## Electrical Connection

Plug	Not present	Voltage	220-240 V
Electrical connection rating	320 W	Frequency (Hz)	50 Hz
Current	1 A	Power supply cable length	1500 mm

Optional accessories

Charcoal filter

KITFC900

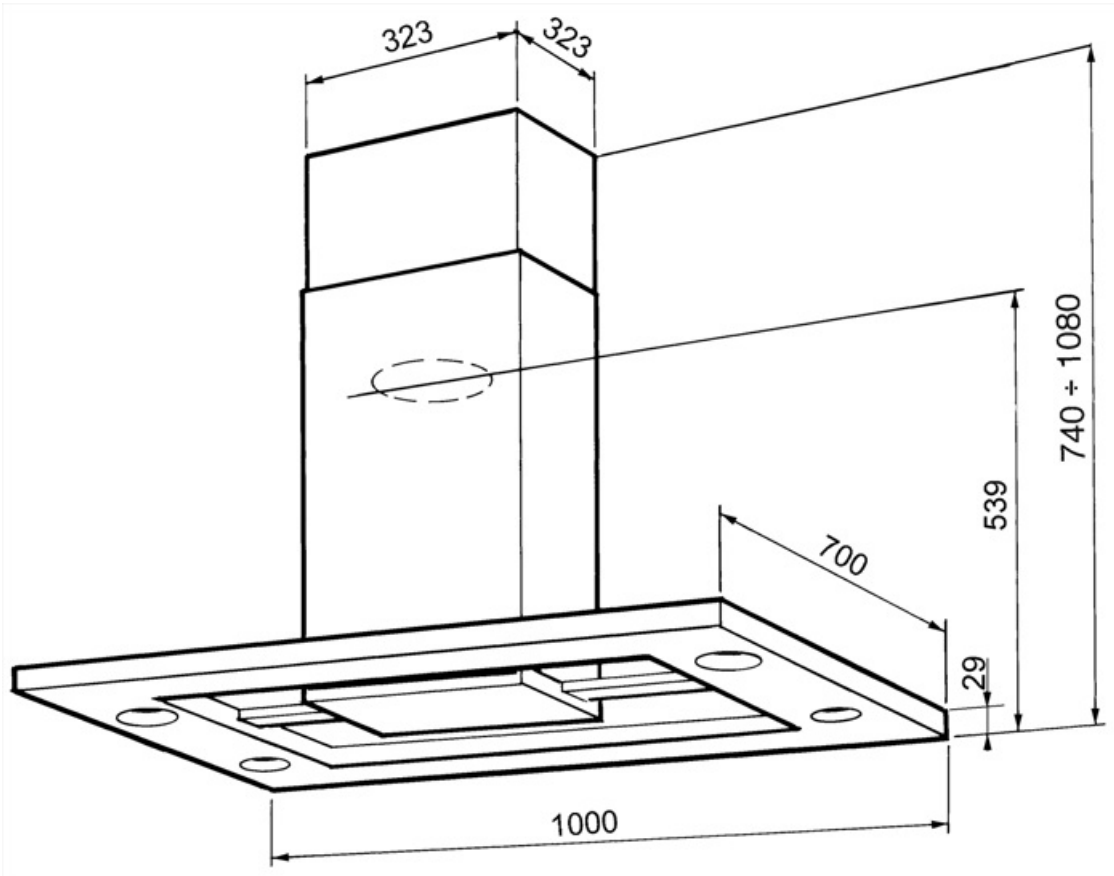

---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Warning light(s):** to advise when filters need changing.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.