

KSLS10MB








| | |
|-----------------------------|------------------------|
| Product family | Hood |
| Hood Type | Decorative island hood |
| Design | Suspended |
| Extraction | Recirculation |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Aluminium |
| Type of steel | Brushed |
| EAN code | 8017709351885 |
| Hood width | 100 cm |
| Aesthetic | Isola |
| Colour | Matt Black |
| Finishing | Satin |
| Glass Type | Black |
| Serigraphy colour | Grey |
| Logo | Silk screen |



Controls

| | | | |
|------------------------|----------------|------------------|-------|
| Control setting | Touch on metal | Led color | White |
|------------------------|----------------|------------------|-------|

Program / Functions

| | |
|---|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Other functions | |
|  Delay_function | |
| Time-setting options |  |
| Auto-vent 2.0 |  |
| H-Condense System | Yes |

Technical Features

| | | | | |
|--|----------------------|------|----------------------------|-----------|
|     | No. of lights | 2 | Motor power | 39 W |
| | Light type | LED | No. of filters | 2 |
| | Light Power | 36 W | Anti-grease filters | Aluminium |

| | | | |
|--------------------------------------|-----------------------|---|--------|
| Dimmer mode | Yes | Filter replacement indicator | Yes |
| Light color temperature range | 2700 - 6500 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 650 m ³ /h | Minimum distance from ELECTRIC hob | 550 mm |

| | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|--|---|
| Speed 1 | 120 | 45 |
| Speed 2 | 200 | 58 |
| Speed 3 | 420 | 65 |
| Intensive speed | 650 | 73 |

Accessories included


| | | | |
|-----------------------|-----|----------------------------------|-----------------|
| Remote control | Yes | Charcoal filters included | Yes regenerable |
| Tube reduction | Yes | | |

Electrical Connection

| | | | |
|-------------------------------------|---|----------------------------------|-------------|
| Battery type | Alkaline-Manganese Dioxide (Zn/MnO ₂) | Frequency (Hz) | 50-60 Hz |
| Electrical connection rating | 291 W | Power supply cable length | 3500 mm |
| Voltage | 220-240 V | Plug | Not present |

Also available

| | | | |
|--------------------------------------|-----------------|--------------------------|--------|
| Alternative colours available | Stainless steel | Available colours | KSL10X |
|--------------------------------------|-----------------|--------------------------|--------|

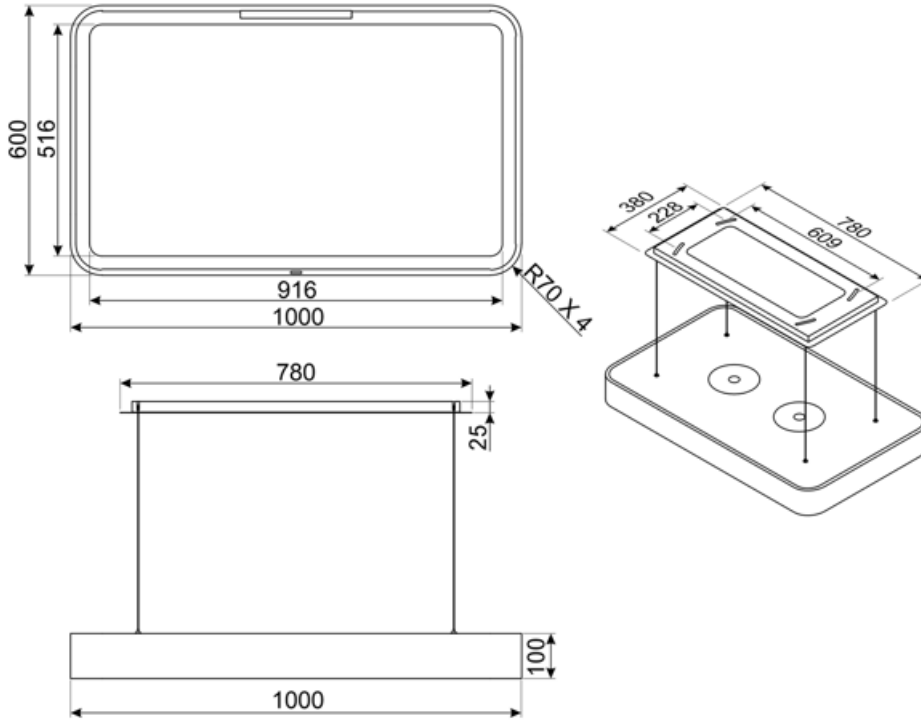











Alternative products



KSL10X

Colour: Stainless steel

Symbols glossary

| | | | |
|--|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Connection between hob and hood |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Delay timer: can be set to run the programme at a convenient time or to take advantage of off-peak energy periods. |  | Dimmering Lights |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction. |  | Intensive/turbo setting: when extra fast extraction is required. |