


# KSVV90NX



Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709226152
Aesthetics	Dolce Stil Novo
Colour	Black
Finishing	Glass
Components finishing	Stainless steel
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen

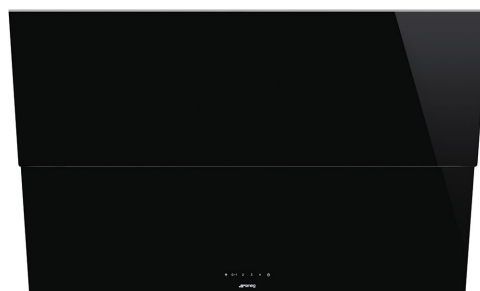

## Controls



Control setting	Touch control	Led colour	Ice
-----------------	---------------	------------	-----

## Program / Functions

No. of speeds	3
Intensive speed	
Time-setting options	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light power	1 W	Vent outlet	150 mm
Light colour	4000 °K	Minimum distance from GAS hob	600 mm
temperature scale (°K)		Minimum distance from ELECTRIC hob	550 mm
Free outlet maximum capacity	830 m³/h	Non return valve	Yes
Motor power	280 W		
No. of filters	2		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	345	48
Speed 2	460	55
Speed 3	600	61
Intensive speed	770	68

## Performance / Energy Label



Annual Efficiency Consumption (AEChood) 59 KWh/year

Energy efficiency class (EEC) A

Fluid Dynamic Efficiency (FDE) 29.6

Fluid Dynamic Efficiency class (FDEC) A

Lighting Efficiency (LE) 107 lux/W

Lighting Efficiency Class (LEC) A

Grease Filtering Efficiency (GFE) 87.1 %

Grease Filtering Efficiency Class (GFEC) B

Air flow at minumum speed (Qmin) 330 m³/h

Maximum extraction rate 563 m³/h

Intensive extraction rate 757 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) 50 dBA

Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) 62 dBA

Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) 68 dBA

Time increase factor (F) 1.00

Energy Efficiency Index per first cavity 51.9

Measured air flow rate at best efficiency point (Qbep) 397 m³/h

Measured air pressure at best efficiency point (Qbep) 431 Pa

Measured electric power input at best efficiency point (Wbep) 159 W

Normal Power of the light system (WI) 2 W

Average illumination of the light on the cooking surface (Emiddle) 250 lux

Sound power level at highest setting (Lwa) 62 dBA

## Electrical Connection

Nominal power 283 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Power supply cable length 1000 mm


## Also available

Alternative colours  
available

Black copper finishing

Available colours

KSVV90NRA

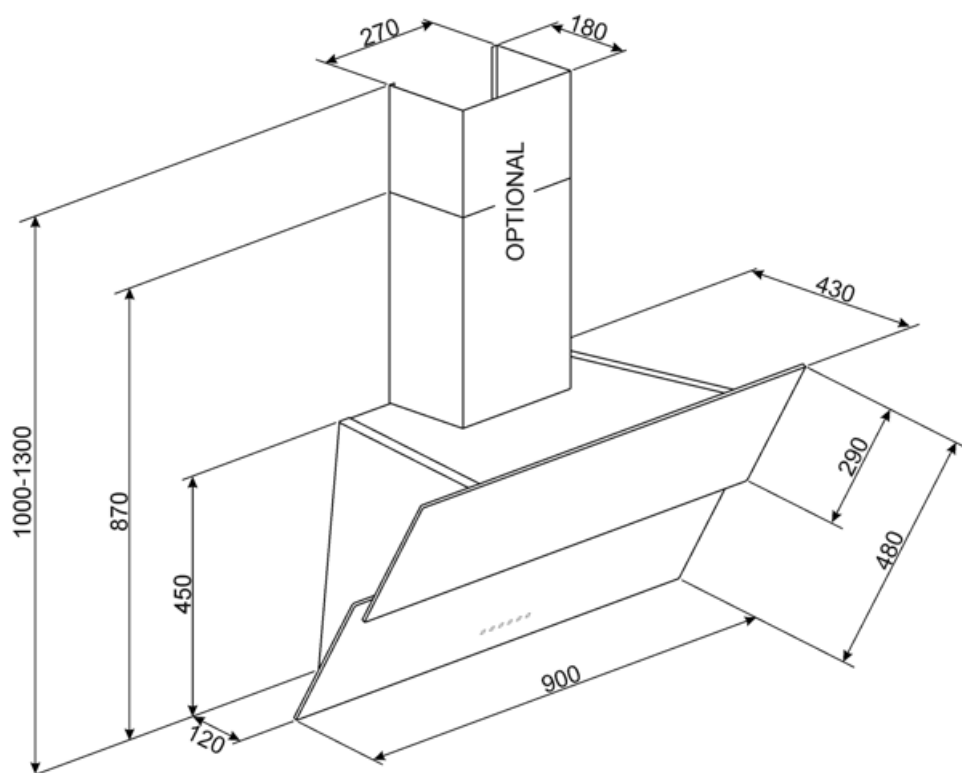

---

## Compatible Accessories

---



### FLT6









Round Charcoal filters (kit 2 pieces)



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary

	A: Product drying performance, measured from A+++ to D / G depending on the product family		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.		Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Touch controls: Easy to use touch controls allow the appliance to be programmed at the touch of a button.		Intensive/turbo setting: when extra fast extraction is required.

---

## Benefit

---

### **Perimetral aspiration**

Enhanced extraction with a perimeter aspiration system ensures optimised performance, for a cleaner, fresher kitchen

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customisable LED lighting lets you adjust both the intensity and color temperature, from warm to cool tones, so you can create the perfect lighting for any mood or task