

KT110BLE

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709211691

Hood width 110 cm
Aesthetics Victoria
Colour Black
Finishing Gloss
Logo Applied



Controls

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 800ST

Technical Features





No. of lights 2 No. of filters 4

Light typeLEDAnti-grease filtersAluminiumLight power1 WVent outlet150 mmLight colour3000 KMinimum distance from750 mm

temperature scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	326	49
Speed 2	439	57



Speed 3	554	63
Intensive speed	784	71

Performance / Energy Label

_	tr
	Ť

Annual Efficiency 57 kWh/year Consumption (AEChood) Energy efficiency class (A speed (SPEmin) EEC) Fluid Dynamic Efficiency 31,1 (FDE) Fluid Dynamic Efficiency A class (FDEC) Lighting Efficiency (LE) 83,2 lux/W Lighting Efficiency Class A (LEC) (SPEboost) **Grease Filtering** 69.2 % Efficiency (GFE) **Grease Filtering** per first cavity Efficiency Class (GFEC) Air flow at minumum 326 m³/h speed (Qmin) (Qbep) Maximum extraction 554 m³/h Intensive extraction rate 784 m³/h (Qbep)

Airbourne acouistical A- 49 dBA weighted sound Power **Emission at minimum** Airborne acoustical A-63 dBA weighted sound Power **Emission at maximum** speed (SPEmax) Airbourne acoustical A- 71 dBA weighted sound power emission at boost speed Time increase factor (F) **Energy Efficiency Index** 52,2 Measured air flow rate 413 m³/h at best efficiency point Measured air pressure 456 Pa at best efficiency point Measured electric 168 W power input at best efficiency point (Wbep) 2 W

efficiency point (Wbep)

Normal Power of the 2 W
light system (Wl)

Average illumination of the light on the cooking surface (Emiddle)

Sound power level at highest setting (Lwa)


Electrical Connection

Nominal power 278 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Also available

Alternative colours White, Stainless steel, Available colours KT110BE-KTR110XE - availible Cream KT110PE



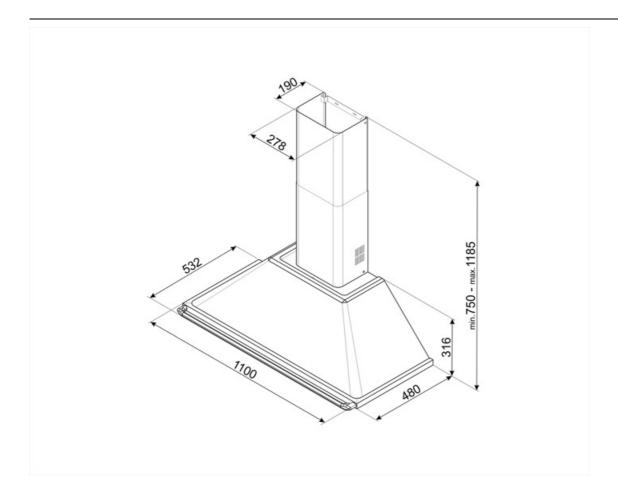



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.