

KT110GRE

Product family

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709303778

Hood width 110 cm

Aesthetics Victoria

Colour Slate Grey

Finishing Gloss

Logo Applied



Controls

Control setting

Control knobs

Control knobs

Victoria

No. of controls

2

Controls colour

Steel effect

Program / Functions

No. of speeds

3

Intensive speed



Technical Features



No. of lights

2

No. of filters

4

Light type

LED

Anti-grease filters

Aluminium

Light power

1 W

Vent outlet

150 mm

Light colour temperature scale (K)

3000 K

Minimum distance from GAS hob

750 mm

Free outlet maximum capacity

820 m³/h

Minimum distance from ELECTRIC hob

650 mm

Motor power

275 W

Non return valve

Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	326	49
Speed 2	439	57

Speed 3	554	63
Intensive speed	784	71

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	57 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (A EEC)			Emission at maximum speed (SPEmax)	64 dBA
Fluid Dynamic Efficiency (FDE)	31.1		Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A		Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	
Lighting Efficiency (LE)	83.2 lux/W		Time increase factor (F)	0.9
Lighting Efficiency Class (LEC)	A		Energy Efficiency Index per first cavity	52.2
Grease Filtering Efficiency (GFE)	69.2 %		Measured air flow rate at best efficiency point (Qbep)	413 m ³ /h
Grease Filtering Efficiency Class (GFEC)	D		Measured air pressure at best efficiency point (Qbep)	456 Pa
Air flow at minimum speed (Qmin)	326 m ³ /h		Measured electric power input at best efficiency point (Wbep)	168 W
Maximum extraction rate	554 m ³ /h		Normal Power of the light system (WI)	2 W
Intensive extraction rate	784 m ³ /h		Average illumination of the light on the cooking surface (Emiddle)	183 lux
			Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection

Nominal power	278 W	Power supply cable length	1000 mm
Voltage	220-240 V		
Frequency (Hz)	50-60 Hz	Plug	No

Also available

Alternative colours available	White, Black, Stainless steel, Cream	Available colours	KT110BE-KTR110XE - KT110PE- KT110BLE
--------------------------------------	--------------------------------------	--------------------------	--------------------------------------

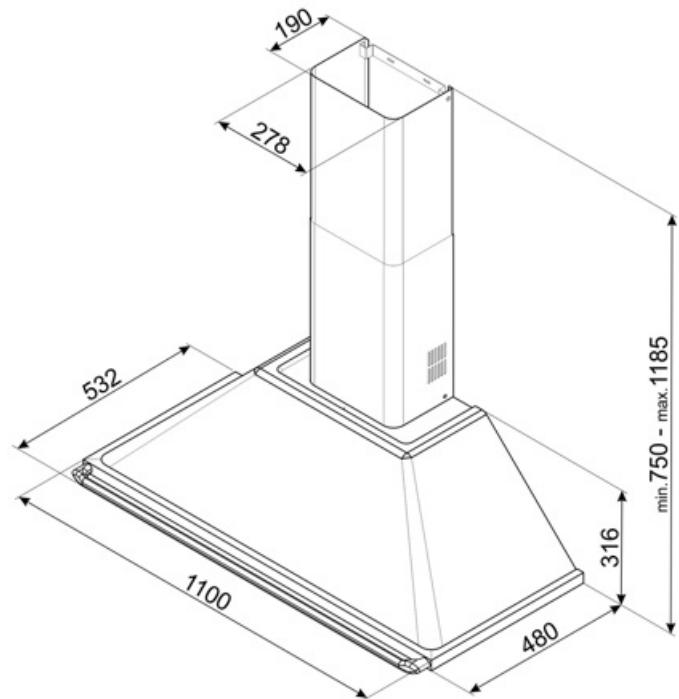

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Intensive/turbo setting: when extra fast extraction is required.