

KT110GRE

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709303778

Hood width 110 cm
Aesthetics Victoria
Colour Slate Grey
Finishing Gloss
Logo Applied



Controls

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

BOOST

Technical Features





No. of lights 2 No. of filters 4

Light typeLEDAnti-grease filtersAluminiumLight power1 WVent outlet150 mmLight colour3000 KMinimum distance from750 mm

temperature scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	326	49
Speed 2	439	57



Speed 3	554	63
Intensive speed	784	71

Performance / Energy Label

_	tr
	Ť

Annual Efficiency 57 kWh/year Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A speed (SPEmin) EEC) Airborne acoustical A-Fluid Dynamic Efficiency 31,1 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 83,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 69.2 % Time increase factor (F) 0,9 Efficiency (GFE) **Energy Efficiency Index Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate Air flow at minumum 326 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 554 m³/h Measured air pressure at best efficiency point Intensive extraction rate 784 m³/h (Qbep) Measured electric

168 W power input at best efficiency point (Wbep) Normal Power of the 2 W light system (WI) Average illumination of 183 lux the light on the cooking surface (Emiddle) Sound power level at 64 dBA

highest setting (Lwa)

64 dBA

52,2

413 m³/h

456 Pa


Electrical Connection

Nominal power 278 W Frequency (Hz) 50-60 Hz Voltage 220-240 V 1000 mm Power supply cable length

Also available

Alternative colours White, Black, Stainless Available colours KT110BE-KTR110XE availible steel, Cream KT110PE-KT110BLE



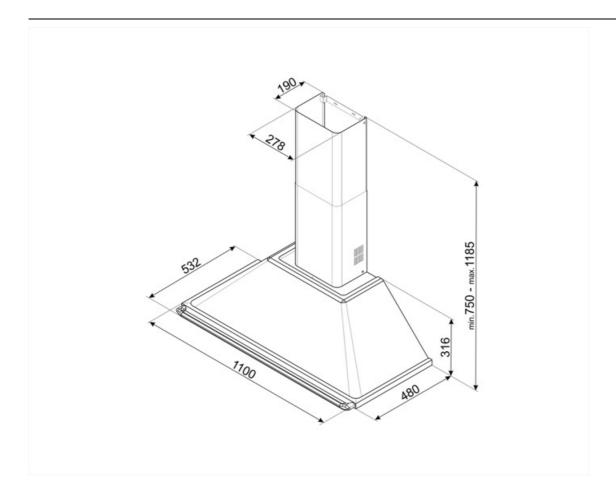



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



·Ö-

A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Intensive/turbo setting: when extra fast extraction is required.

Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.