

KT110PA

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionElectronic controlYes

Material Painted material

Type of steel Brushed

EAN code 8017709217136



Aesthetics

AestheticVictoriaFinishingGlossyColourCreamLogoApplied

Controls

Control setting Electronic buttons Led color White

Program / Functions

No. of speeds Intensive speed

Time-setting options



Technical Features



No. of lights2No. of filters4Light typeLEDAnti-grease filtersAluminium

Light Power2 WVent outlet150 mmLight color temperature3000 °KMinimum distance from750 mm

scale (°K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm capacity ELECTRIC hob

Motor power 275 W Non return valve Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	50
Speed 2	439	57
Speed 3	567	63
Intensive speed	788	70

Electrical Connection

Electrical connection

279 W

rating

Voltage 220-240 V

Frequency (Hz)
Power supply cable


length

50-60 Hz

y cable 1000 mm

Also available

Alternative colours Black Available colours KT110BLA availible

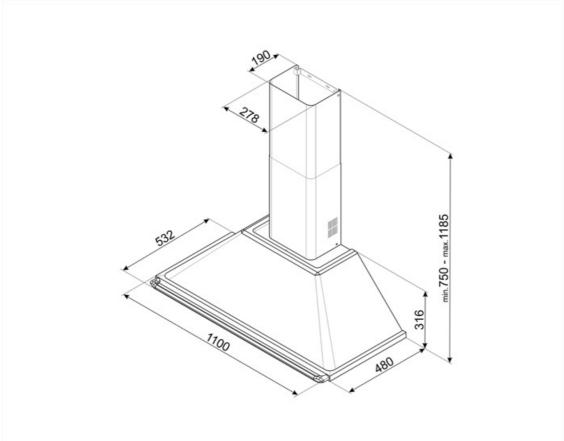



Not included accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.