

KT110PA

Product family

Hood Type Decorative wall hood

Hood

Design Chimney
Extraction Extraction
Yes

Material Painted material

Type of steel Brushed

EAN code 8017709217136

Hood width 110 cm



Aesthetics

AestheticVictoriaFinishingGlossyColourCreamLogoApplied

Controls

Control setting Electronic buttons Led color White

Programs / Functions

No. of speeds Intensive speed

Time-setting options



Technical Features



No. of lights 2 No. of filters 4

Light typeLEDAnti-grease filtersAluminiumLight Power2 WVent outlet150 mmLight color temperature3000 °KMinimum distance from750 mm

scale (°K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm capacity ELECTRIC hob

Motor power 275 W Non return valve Yes



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dB(A)]
Speed 1	334	50
Speed 2	439	57
Speed 3	567	63
Intensive speed	788	70

Electrical Connection

Electrical connection

279 W

rating

Voltage 220-240 V

Frequency (Hz)
Power supply cable

length

50-60 Hz

1000 mm


Also available

Alternative colours availible

Black

Available colours

KT110BLA

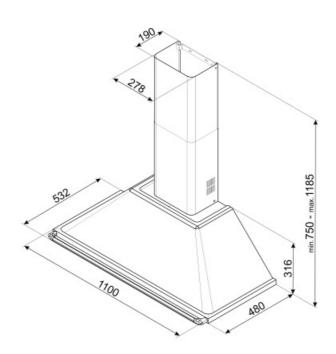



Not included accessories

FLT6



Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.