

KT110PE

Product family Hood

Hood Type Decorative wall hood

Design Chimney Extraction Extraction Material Painted material Type of steel Brushed

8017709211707 **EAN** code

Hood width 110 cm **Aesthetic** Victoria Colour Cream **Finishing** Glossy Logo Applied



Controls

Control knobs **Control knobs** Victoria Control setting No. of controls Controls colour Steel effect 2

Program / Functions

No. of speeds Intensive speed

Technical Features



No. of lights

2 Light type **LED**

Light color temperature 3000 K

scale (K)

capacity

Light Power

Free outlet maximum

1 W

820 m³/h

No. of filters

Anti-grease filters Aluminium Vent outlet 150 mm Minimum distance from 750 mm

GAS hob

Minimum distance from

650 mm

ELECTRIC hob

275 W Motor power Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	326	49
Speed 2	439	57

SMEG SPA 11/24/2025



Speed 3	554	63
Intensive speed	784	71

Performance / Energy Label

	A
	Ť.

Annual Efficiency 57 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-63 dBA Fluid Dynamic Efficiency 31,1 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 83,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 69.2 % **Energy Efficiency Index** 52.2 Efficiency (GFE) Measured air flow rate 413 m³/h **Grease Filtering** at best efficiency point Efficiency Class (GFEC) (Qbep) Air flow at minumum 326 m³/h Measured air pressure 456 Pa speed (Qmin) at best efficiency point Air flow at maximum 554 m³/h (Pbep) speed (Qmax) Measured electric 168 W Air flow at boost speed 784 m³/h power input at best (Qboost) efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 183 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 278 W Power supply cable 1000 mm

rating length

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz

Also available

Alternative colours White, Black, Stainless Available colours KT110BE-KT110BLE - steel KTR110XE


SMEG SPA 11/24/2025

Sound power level at

highest setting (Lwa)

63 dBA



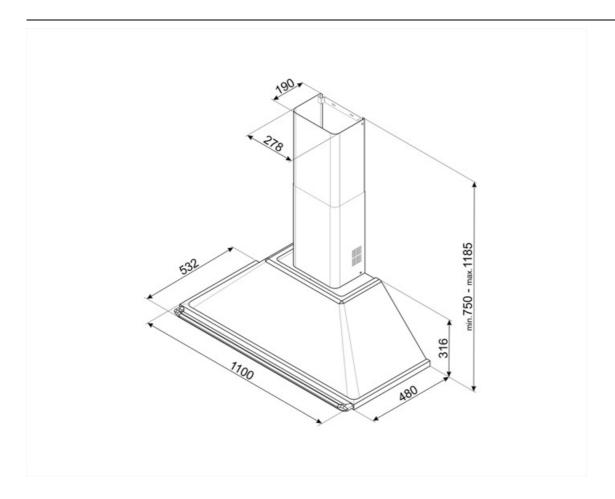

SMEG SPA 11/24/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 11/24/2025




Symbols glossary



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 11/24/2025