

# KT110PE


Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709211707
Aesthetic	Victoria
Colour	Cream
Acabamento	Brilhante
Logotipo	Logotipo aplicado





## Controls

Control setting	Control knobs	Control knobs	Victoria
No. of controls	2	Controls colour	Steel effect

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	No
Other functions	No
Time-setting options	No
Other options	No
Ventilação automática	No

## Technical Features

		Hood without motor	No	No. of filters	4
		Remote motor	No	Anti-grease filters	Aluminium
		No. of lights	2	Charcoal filters included	No
		Light type	LED	Filter replacement indicator	No
		Light Power	1 W	Vent outlet	150 mm
		Dimmer mode	No	Minimum distance from GAS hob	750 mm
		Escala de temperatura de cor clara (°K)	3000 °K		

Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	650 mm
Motor power	275 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	326	49
Speed 2	439	57
Speed 3	554	63
Intensive speed	784	71

## Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

## Performance / Energy Label



Consumo anual de energía (CAE exaustor)	57 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	63 dBA
Fluid Dynamic Efficiency (FDE)	31,1	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	71 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Energy Efficiency Index	52,2
Lighting Efficiency (LE)	83,2 lux/W	Measured air flow rate at best efficiency point (Qbep)	413 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Pbep)	456 Pa
Grease Filtering Efficiency (GFE)	69,2 %	Measured electric power input at best efficiency point (Wbep)	168 W
Grease Filtering Efficiency Class (GFEC)	D	Nominal Power consumption of the light system (WL)	2 W
Air flow at minumum speed (Qmin)	326 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	183 lux
Air flow at maximum speed (Qmax)	554 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	63 dBA
Air flow at boost speed (Qboost)	784 m <sup>3</sup> /h		

## Electrical Connection


Plug	No	Frequency (Hz)	50-60 Hz
Electrical connection rating	278 W	Comprimento do cabo de alimentação	1000 mm
Voltage	220-240 V		

## Also available

Outras cores disponíveis Branca, Preta, Aço inox

Códigos das outras cores disponíveis

KT110BE-KT110BLE -  
KTR110XE

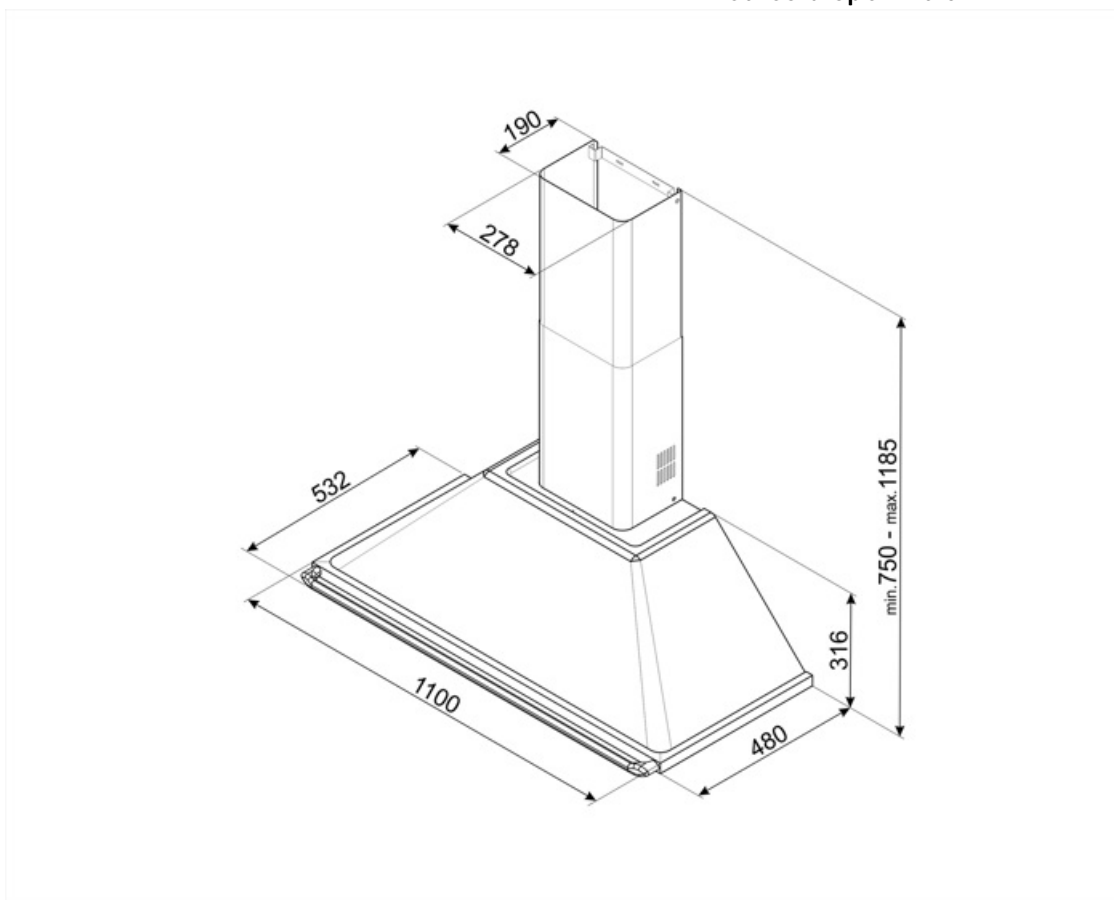

---

## Compatible Accessories

---

### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITCMNKPU

Dimensão da extensão da chaminé  
227,5 \* 190 \* 800 Exaustor Victoria 90  
cm, creme



### KITALLFC

Filtro de carvão universal Aço  
inoxidável AISI 304 O filtro pode ser  
lavado na máquina lava-louça a 50 °C  
(água e detergente adequado) e para  
secar colocar no forno 180°C 25  
minutos



---

## Symbols glossary

---



**Filtros:** O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



**Luzes:** Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



**R:** Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos



**Configuração intensiva/turbo:** quando a extração extra rápida é necessária.