

KT90BLE

Product family

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709211653

Hood width 90 cm

Aesthetics Victoria

Colour Black

Finishing Gloss

Logo Applied



Controls

Control setting

No. of controls 2

Control knobs

Control knobs

Controls colour

Victoria

Steel effect

Program / Functions

No. of speeds

Intensive speed

4



Technical Features



No. of lights

2

No. of filters

3

Light type

LED

Anti-grease filters

Aluminium

Light power

1 W

Vent outlet

150 mm

Light colour

3000 K

Minimum distance from GAS hob

750 mm

temperature scale (K)

820 m³/h

Minimum distance from ELECTRIC hob

650 mm

Free outlet maximum capacity

275 W

Non return valve

Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	334	49
Speed 2	439	57

Speed 3	567	61
Intensive speed	788	69

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	59 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	49 dBA
Energy efficiency class (A EEC)			Emission at maximum speed (SPEmax)	61 dBA
Fluid Dynamic Efficiency (FDE)	30		Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)	69 dBA
Fluid Dynamic Efficiency class (FDEC)	A		Time increase factor (F)	1.00
Lighting Efficiency (LE)	102.3 lux/W		Energy Efficiency Index per first cavity	52.4
Lighting Efficiency Class (LEC)	A		Measured air flow rate at best efficiency point (Qbep)	438 m³/h
Grease Filtering Efficiency (GFE)	76.6 %		Measured air pressure at best efficiency point (Qbep)	434 Pa
Grease Filtering Efficiency Class (GFEC)	C		Measured electric power input at best efficiency point (Wbep)	176 W
Air flow at minimum speed (Qmin)	334 m³/h		Normal Power of the light system (WI)	2 W
Maximum extraction rate	567 m³/h		Average illumination of the light on the cooking surface (Emiddle)	225 lux
Intensive extraction rate	788 m³/h		Sound power level at highest setting (Lwa)	61 dBA

Electrical Connection

Nominal power	278 W	Power supply cable length	1000 mm
Voltage	220-240 V		
Frequency (Hz)	50-60 Hz	Plug	No

Also available

Alternative colours available	White, Stainless steel, Cream	Available colours	KT90BE - KTR90XE - KT90PE
--------------------------------------	-------------------------------	--------------------------	---------------------------

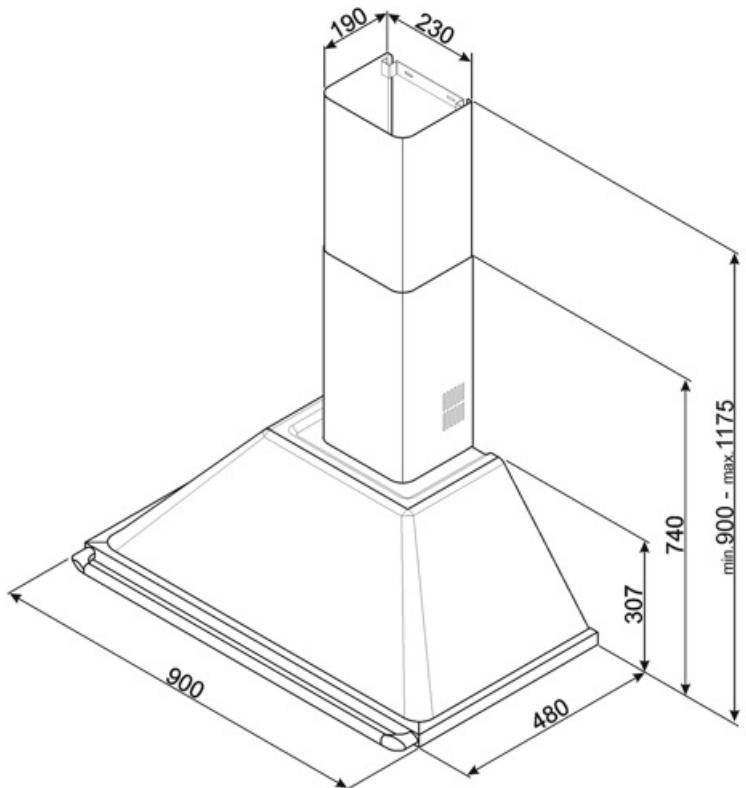

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITCMNKBU

Prolunga Camino per cappa VICTORIA
nera dimensioni 227,5 * 190 * 800 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary

 A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.

 Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.