

# KT90DGC

**Product family** Hood

**Hood Type** Decorative wall hood

Design Chimney Extraction Extraction Painted material Material

Type of steel Brushed

**EAN** code 8017709266721

Hood width 90 cm **Aesthetic** Victoria

Colour Decorated / Special

**Decoration / Special colour** Carretto **Finishing** Glossy Serie

Divina Cucina

Collaborations Smeg & Dolce&Gabbana

Applied Logo



#### **Controls**

Control knobs Control knobs Victoria Control setting No. of controls Controls colour Steel effect 2

### **Program / Functions**

No. of speeds Intensive speed

#### **Technical Features**





No. of lights No. of filters 2 3

Light type **LED** Anti-grease filters Stainless steel 150 mm **Light Power** 1 W Vent outlet Light color temperature 3000 K Minimum distance from 750 mm

scale (K) GAS hob

Minimum distance from Free outlet maximum 820 m<sup>3</sup>/h 650 mm

capacity **ELECTRIC hob** 

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57

**SMEG SPA** 27/11/2025



Speed 3	567	61
Intensive speed	788	69

### Performance / Energy Label

	A
	Ť.

**Annual Efficiency** 59 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-61 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102.3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) 76.6 % **Grease Filtering** Time increase factor (F) 1.00 Efficiency (GFE) **Energy Efficiency Index** 52.4 **Grease Filtering** Measured air flow rate 438 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 334 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured air pressure 434 Pa Air flow at maximum 567 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 788 m<sup>3</sup>/h Measured electric 176 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 225 lux the light on the cooking surface (Emiddle)

#### **Electrical Connection**

Electrical connection 278 W Frequency (Hz) 50-60 Hz rating Power supply cable 1000 mm Voltage 220-240 V length

#### Also available

Alternative colours Caltagirone majolica Available colours KT90DGM availible


SMEG SPA 27/11/2025

Sound power level at

highest setting (Lwa)

61 dBA



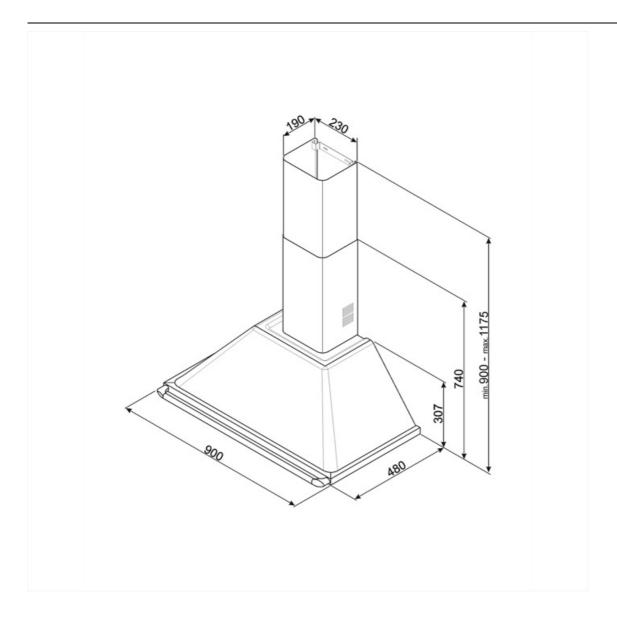

SMEG SPA 27/11/2025



# **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 27/11/2025



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 27/11/2025