

KT90DGME

Product family Hood

Hood Type Decorative wall hood

DesignChimneyExtractionExtractionMaterialPainted material

Type of steel Brushed

EAN code 8017709334062

Hood width 90 cm Aesthetic Victoria

ColourDecorated / SpecialDecoration / Special colourBlu Mediterraneo

Finishing Glossy

Series Divina Cucina

Collaborations Smeg & Dolce&Gabbana

Logo Applied



Controls

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3

Technical Features





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersStainless steelLight Power1 WVent outlet150 mmLight color temperature3000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57



Speed 3	567	61
Intensive speed	788	69

Performance / Energy Label

/	W***
	Ŧ.
	D

Annual Efficiency 59 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-61 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102,3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 76.6 % Time increase factor (F) 1,00 Efficiency (GFE) **Energy Efficiency Index** 52,4 **Grease Filtering** Measured air flow rate 438 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 334 m³/h (Qbep) speed (Qmin) Measured air pressure 434 Pa Air flow at maximum 567 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 788 m³/h Measured electric 176 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 225 lux the light on the cooking

Electrical Connection

Electrical connection 278 W Power supply cable 1000 mm

rating length
Voltage 220-240 V Plua Not

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz

Also available

Alternative colours Sicilian Cart Available colours KT90DGC availible


SMEG SPA 2025/12/10

surface (Emiddle) Sound power level at

highest setting (Lwa)

61 dBA



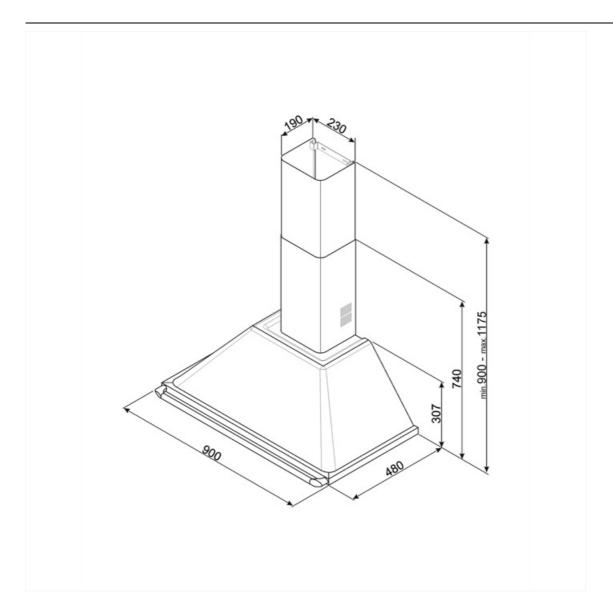



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.