

# KT90GRE

**Product family** Hood

**Hood Type** Decorative wall hood

Design Chimney Extraction Extraction Painted material Material Brushed

Type of steel 8017709303785 **EAN** code

Hood width 90 cm **Aesthetic** Victoria Colour Slate Grey **Finishing** Glossy Logo Applied



### **Controls**

Control knobs **Control knobs** Victoria Control setting No. of controls Controls colour Steel effect 2

## **Program / Functions**

No. of speeds Intensive speed

## **Technical Features**



No. of lights

No. of filters 2 3 Anti-grease filters **LED** 

Light type Aluminium 150 mm Vent outlet **Light Power** 1 W Light color temperature 3000 K Minimum distance from 750 mm

scale (K) GAS hob

Minimum distance from Free outlet maximum 820 m<sup>3</sup>/h 650 mm

**ELECTRIC hob** capacity

275 W Motor power Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57

**SMEG SPA** 14/12/2025



Speed 3	567	62
Intensive speed	788	69

## Performance / Energy Label

/	W***
	Ŧ.
	D

**Annual Efficiency** 59 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-62 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102.3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 76.6 % Time increase factor (F) 0.9 Efficiency (GFE) **Energy Efficiency Index** 52.4 **Grease Filtering** Measured air flow rate 438 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 334 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured air pressure 434 Pa Air flow at maximum 567 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 788 m<sup>3</sup>/h Measured electric 176 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 225 lux the light on the cooking surface (Emiddle)

### **Electrical Connection**

Electrical connection 278 W Power supply cable 1000 mm

rating length

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz

## Also available

Alternative colours White, Black, Stainless Available colours KT90BE - KTR90XE - available steel, Cream KT90PE - KT90BLE


SMEG SPA 14/12/2025

Sound power level at

highest setting (Lwa)

62 dBA



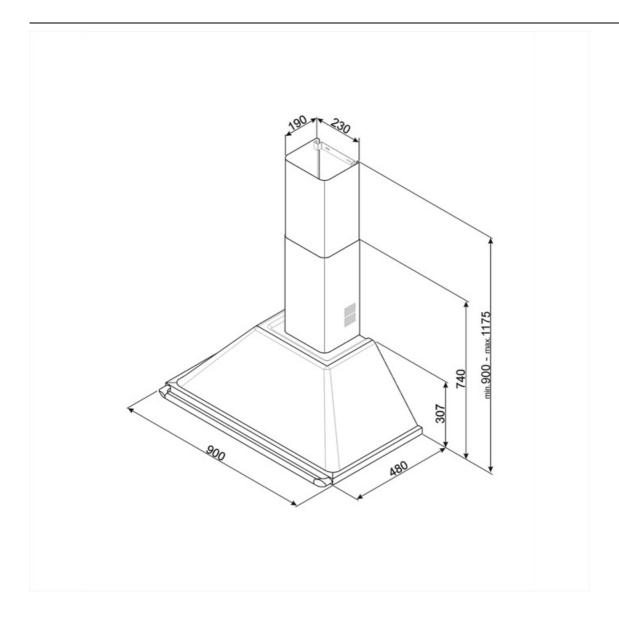

SMEG SPA 14/12/2025



## **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)



# (kit 2 pieces)

#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

#### **KITCMNKBU**

Chimney extension size 227.5 \* 190 \* 800 mm black color, allow to reach 1475 mm of total high of the hood

SMEG SPA 14/12/2025



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 14/12/2025