

KT90PE

Product family Hood

Hood Type Decorative wall hood

Design Chimney Extraction Extraction Material Painted material Type of steel Brushed

8017709211677 **EAN** code

Hood width 90 cm **Aesthetic** Victoria Colour Cream **Finishing** Glossy Logo Applied



Controls

Control knobs **Control knobs** Victoria Control setting No. of controls Controls colour Steel effect 2

Program / Functions

No. of speeds Intensive speed



Technical Features



No. of lights

No. of filters 2 3 Anti-grease filters Light type **LED** Aluminium

Light Power Vent outlet 150 mm 1 W Light color temperature 3000 K Minimum distance from 750 mm

scale (K) GAS hob

Minimum distance from Free outlet maximum 820 m³/h 650 mm

ELECTRIC hob capacity

275 W Motor power Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57

SMEG SPA 12/12/2025



Speed 3	567	61
Intensive speed	788	69

Performance / Energy Label

	A***
	Ť

Annual Efficiency 59 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-61 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102,3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 76.6 % Time increase factor (F) 1,00 Efficiency (GFE) **Energy Efficiency Index** 52,4 **Grease Filtering** Measured air flow rate 438 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 334 m³/h (Qbep) speed (Qmin) Measured air pressure 434 Pa Air flow at maximum 567 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 788 m³/h Measured electric 176 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 225 lux the light on the cooking surface (Emiddle)

Electrical Connection

Electrical connection 278 W Power supply cable 1000 mm

rating length

White, Black, Stainless

220-240 V Plug Voltage Not present Frequency (Hz) 50-60 Hz

Also available

Alternative colours

KT90BE - KT90BLE available KTR90XE

steel

SMEG SPA 12/12/2025


Sound power level at

highest setting (Lwa)

Available colours

61 dBA



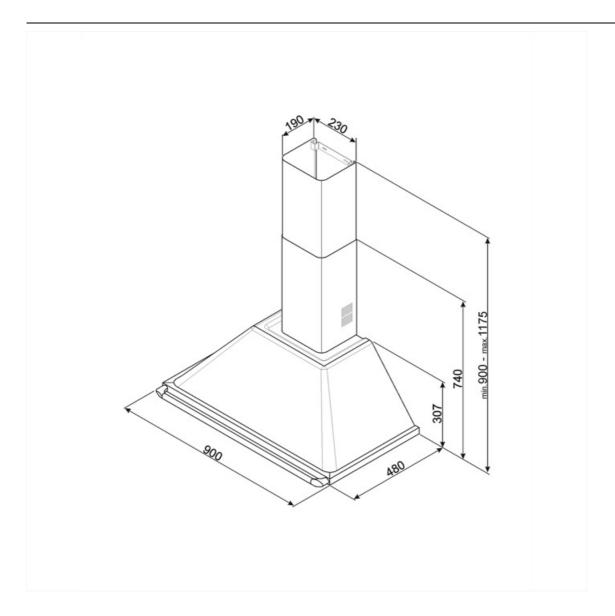

SMEG SPA 12/12/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

KITCMNKPU

Chimney extension size 227.5 * 190 * 800 mm cream color, allow to reach 1475 mm of total high of the hood

SMEG SPA 12/12/2025



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 12/12/2025