

KTE60E2

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Visible front panel
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709333652
Hood width	60 cm
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin
Components finishing	Stainless steel
Serigraphy colour	Black
Logo	Silk screen



Controls

Control setting	Slider
-----------------	--------

Program / Functions

No. of speeds	3
---------------	---

Technical Features

			
No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Aluminium
Light Power	6 W	Vent outlet	125 mm
Light color temperature scale (K)	2700 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	282 m³/h	Minimum distance from ELECTRIC hob	500 mm
Motor power	95 W		

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	124	44
Speed 2	153	51

Speed 3	266	62
------------	-----	----

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	55 kWh/a
Energy efficiency class (EEC)	D
Fluid Dynamic Efficiency (FDE)	9.2
Fluid Dynamic Efficiency class (FDEC)	E
Lighting Efficiency (LE)	20.1 lux/W
Lighting Efficiency Class (LEC)	B
Grease Filtering Efficiency (GFE)	65.1 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minumum speed (Qmin)	125 m³/h
Air flow at maximum speed (Qmax)	265 m³/h

Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Time increase factor (F)	1
Energy Efficiency Index	1.7
Measured air flow rate at best efficiency point (Qbep)	155 m³/h
Measured air pressure at best efficiency point (Pbep)	175 Pa
Measured electric power input at best efficiency point (Wbep)	82 W
Nominal Power consumption of the light system (WL)	6 W
Average illumination of the light on the cooking surface (Emiddle)	121 lux
Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection

Electrical connection rating	101 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

CAPPA	L ⁻⁰⁵
CM 60	599
CM 90	899

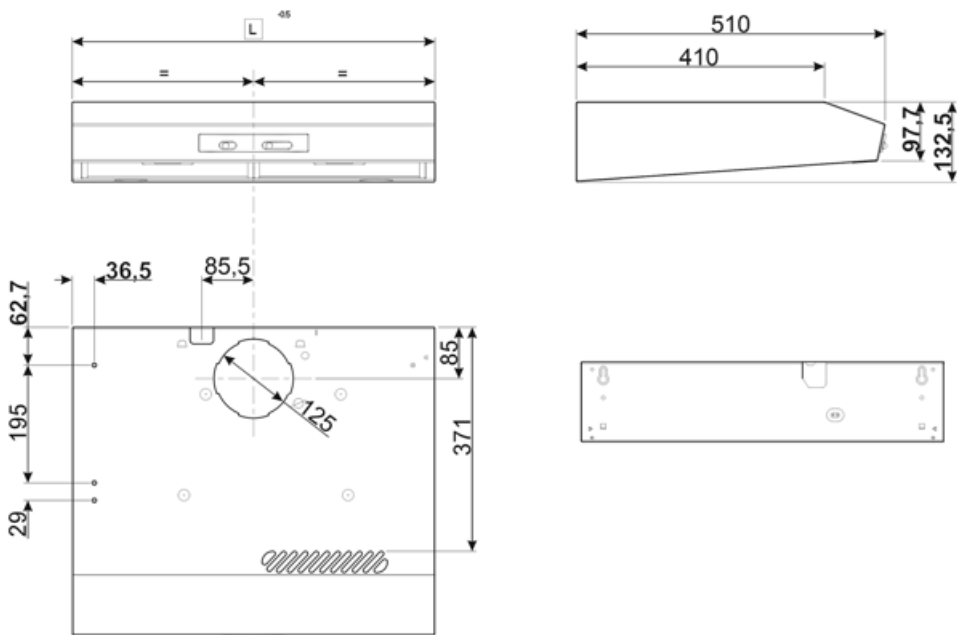

Compatible Accessories



KITFC550

Charcoal filters Kit 1 piece

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

