

# KTE60E2

Product family Hood

Hood Type Integrated (semi) hood

Design Visible front panel

Extraction Extraction

Material Stainless steel

Type of steel Brushed

EAN code 8017709333652

Hood width 60 cm
Aesthetic Universale
Colour Stainless steel

Finishing Satin

Components finishing Stainless steel

Serigraphy colour Black
Logo Silk screen



### **Controls**

Control setting Slider

### **Program / Functions**

No. of speeds 3

#### **Technical Features**





No. of lights 2 No. of filters 1

Light typeLEDAnti-grease filtersAluminiumLight Power6 WVent outlet125 mmLight color temperature2700 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 282 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 95 W

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	124	44
Speed 2	153	51



Speed 266	62
-----------	----

### Performance / Energy Label

**Annual Efficiency** 55 kWh/a Airbourne acouistical A- 50 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class D speed (SPEmin) (EEC) Airborne acoustical A-64 dBA Fluid Dynamic Efficiency 9.2 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency E speed (SPEmax) class (FDEC) Time increase factor (F) Lighting Efficiency (LE) 20.1 lux/W **Energy Efficiency Index** 1.7 Lighting Efficiency Class B Measured air flow rate 155 m<sup>3</sup>/h (LEC) at best efficiency point **Grease Filtering** 65.1 % (Qbep) Efficiency (GFE) Measured air pressure 175 Pa **Grease Filtering** D at best efficiency point Efficiency Class (GFEC) (Pbep) Air flow at minumum 125 m<sup>3</sup>/h Measured electric 82 W speed (Qmin) power input at best Air flow at maximum 265 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 6 W consumption of the light system (WL) Average illumination of 121 lux the light on the cooking surface (Emiddle)

#### **Electrical Connection**

Frequency (Hz)

Electrical connection	101 W	Power supply cable	1500 mm
rating		length	
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		


Sound power level at


highest setting (Lwa)

64 dBA



CAPPA	L -0.5
CM 60	599
CM 90	899

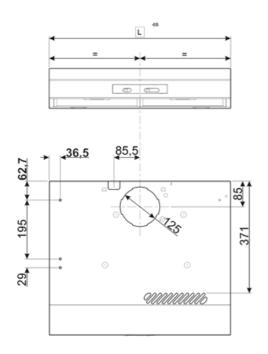







# **Compatible Accessories**



KITFC550 Charcoal filters Kit 1 piece



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.